

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Platinum SERIES SPECIFIC

28 041 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

Planning tips:

- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.
- WRAS

| | | |
|---|--------------------------------|---------------|
|  | Platinum | 28 041 980-08 |
|  | Chrome | 28 041 980-00 |
|  | Brushed Platinum | 28 041 980-06 |
|  | Brushed Durabronze (23kt Gold) | 28 041 980-28 |
|  | Matte Black | 28 041 980-33 |
|  | Brushed Champagne (22kt Gold) | 28 041 980-46 |
|  | Champagne (22kt Gold) | 28 041 980-47 |
|  | Brushed Chrome | 28 041 980-93 |
|  | Brushed Dark Platinum | 28 041 980-99 |

Required miscellaneous




Concealed ceiling installation box 35 041 970 90 with ceiling fixing -

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" outlet
- concealed rough parts

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Platinum SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

mm [inches]

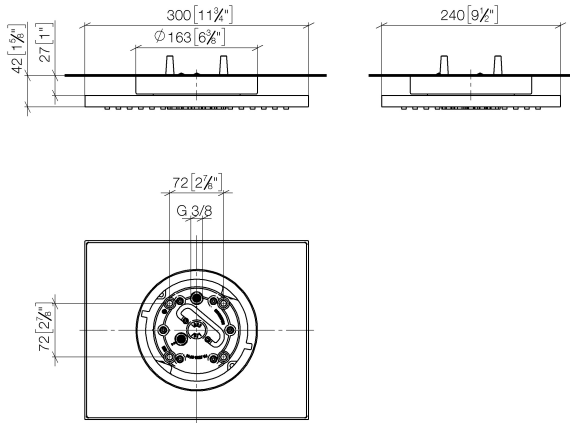

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen




Rain shower for surface-mounted ceiling installation 300 x 240 mm - Platinum SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

Certificates and sustainability

LGA_38

WRAS_240502

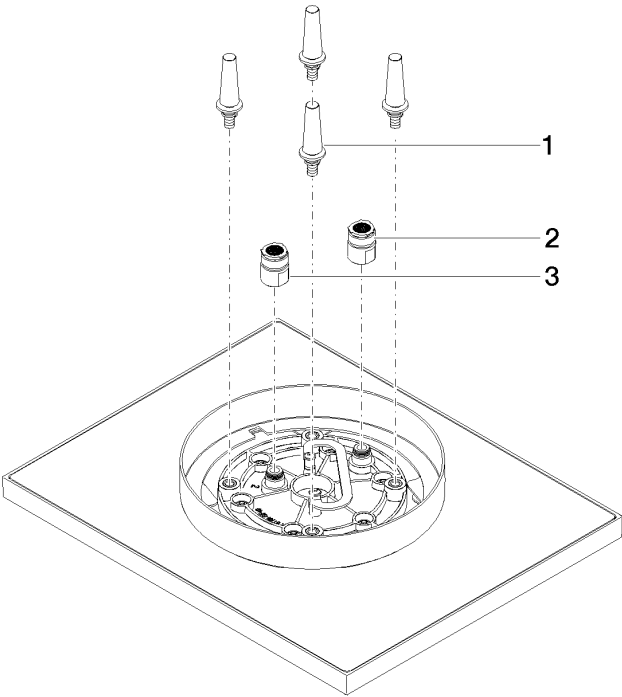

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 1 | 90 17 20 263 00 90 | fixing set | 1.00 | 2 |
| 2 | 90 24 03 309 01 90 | connection | 1.00 | 2 |
| 3 | 90 24 03 309 00 90 | connection | 1.00 | 2 |