







28 528 360



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 7 l/min (at 3 bar)
- rosette Ø 55 mm
- 1/2" connection

	Brushed Durabronz (23kt Gold)	28 528 360-28
	Chrome	28 528 360-00
	Brushed Platinum	28 528 360-06
	Platinum	28 528 360-08
	Durabronz (23kt Gold)	28 528 360-09
	Brushed Dark Platinum	28 528 360-99

Recommended miscellaneous




Concealed wall elbow -

35 085 970 90

- max. recess depth 163 mm
- min. recess depth 90 mm

28 528 360

mm [inches]



Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



MADISON Body spray without volume control - Brushed Durabrass (23kt Gold)

MADISON


28 528 360

Certificates

LGA_38

WRAS_240602

28 528 360

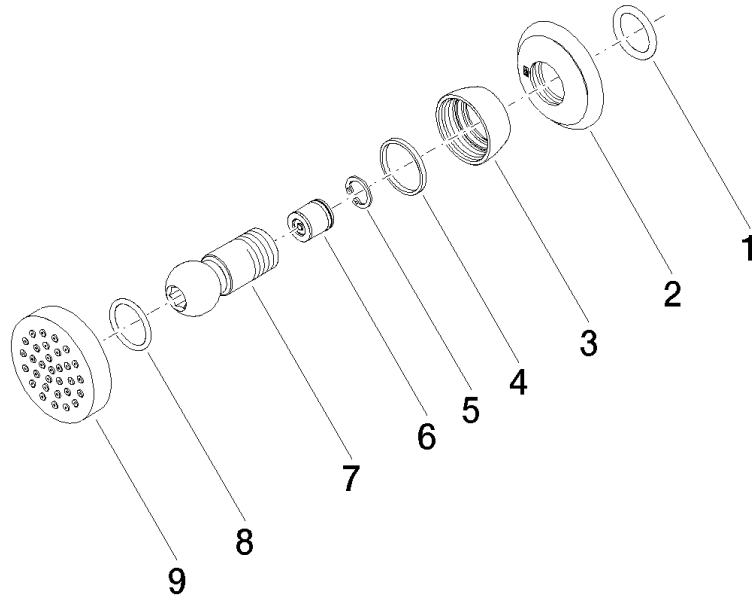



MADISON Body spray without volume control - Brushed Durabronz (23kt Gold)

MADISON

28 528 360

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 14 10 026 00 90	seal	9	2