




Concealed wall-mounted mixer spout on left -

35 713 970 90



- red brass, lead-free
- 2x female thread 1/2" connections
- 3x female thread 1/2" outlet
- 3x sealing plug 1/2"
- 3x dust cover
- soundproofing
- gauge 100 mm

Required miscellaneous

Leak protection 1/2" -

12 010 970 90






Concealed wall-mounted mixer spout on left -


35 713 970 90

mm [inches]

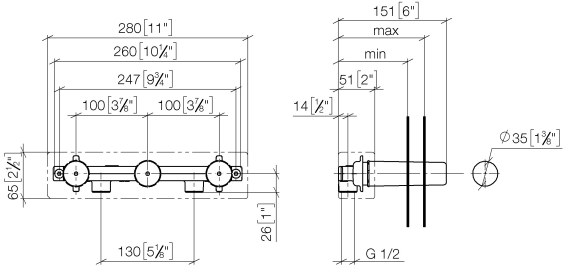

	min	max
Supernova	65 [2 1/2"]	130 [5 1/8"]
Deque	65 [2 1/2"]	130 [5 1/8"]
Tara	65 [2 1/2"]	130 [5 1/8"]
Waia	64 [2 1/2"]	136 [5 3/8"]
CL-2	97 [3 7/8"]	120 [4 3/4"]

Flow rate chart

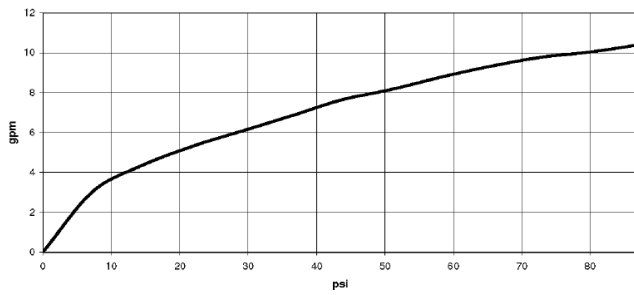

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen

XP P 41-280



Concealed wall-mounted mixer spout on left -

35 713 970 90

Certificates


ACS_21 ACC LY

LGA_19

LGA_19

Concealed wall-mounted mixer spout on left -

35 713 970 90

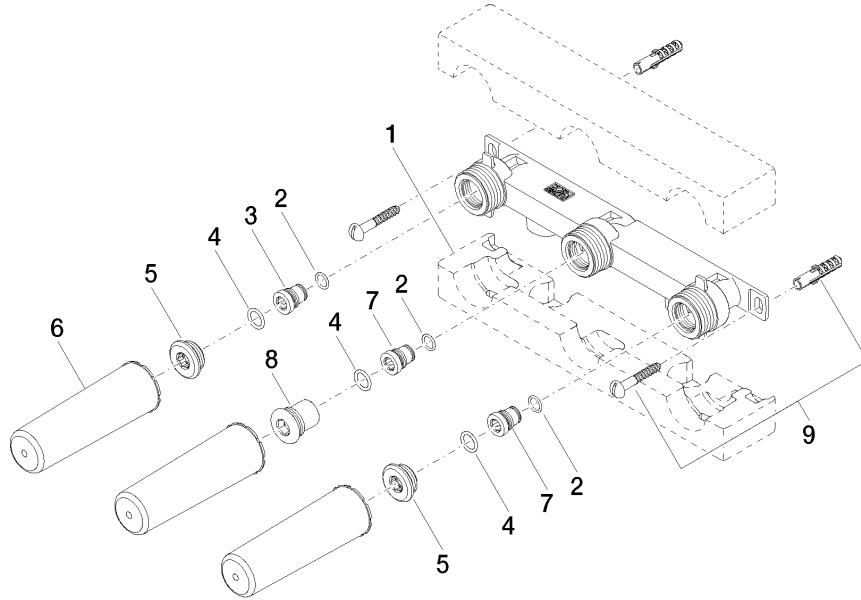



Concealed wall-mounted mixer spout on left -

35 713 970 90

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	09 11 11 043 90	accessories	17	2