

Concealed single-lever mixer with cover plate with integrated shower connection - Platinum

SERIES SPECIFIC

36 045 660 Product version up to 5/15/2020



- cover plate Ø 78 mm
- WRAS

Intrinsic protection against back flow.

Article cannot be extended, please check the depth of the installation location!

Intrinsic protection against back flow.

Article cannot be extended, please check the depth of the installation location!

Required miscellaneous

Concealed wall mounting -

35 003 970 90




- max. recess depth 103 mm
- min. recess depth 78 mm


Concealed single-lever mixer with cover plate with integrated shower connection - Platinum

SERIES SPECIFIC

36 045 660 Product version up to 5/15/2020
mm [inches]

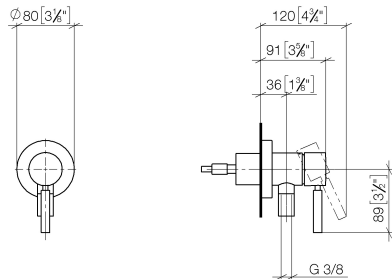

Flow rate chart

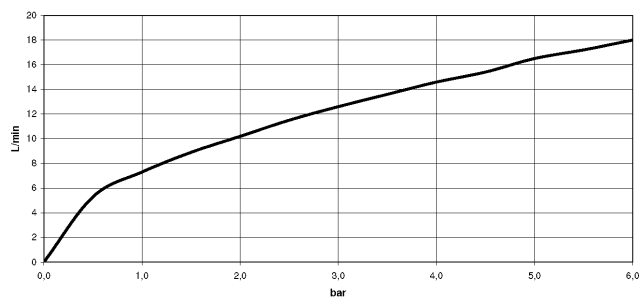

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Concealed single-lever mixer with cover plate with integrated shower
connection - Platinum

SERIES SPECIFIC


36 045 660 Product version up to 5/15/2020

Certificates and sustainability

Belgaqua_21-025-2 LGA_29

WRAS_2101

36 045 660 Product version up to 5/15/2020

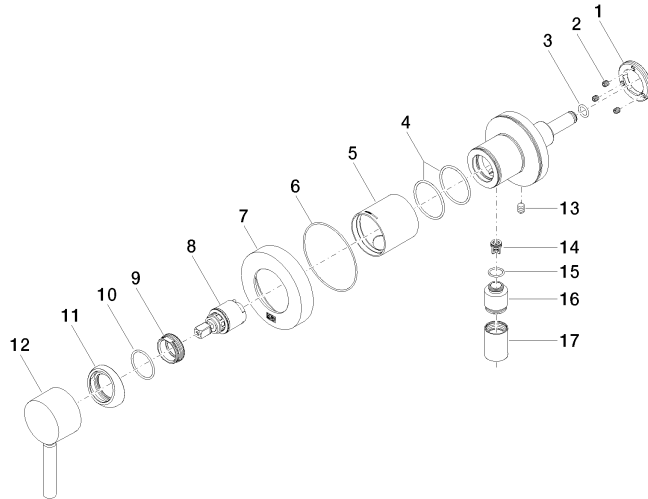

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	09 18 40 215-08	sleeve	1.00	40
7	09 27 66 000-08	rosette	1.00	40
4	09 14 10 111 90	seal	2.00	2
15	09 14 10 213 90	seal	1.00	2
6	09 14 10 518 90	seal	1.00	60
9	09 24 04 266 90	nut	1.00	2
8	90 15 05 044 00 90	cartridge	1.00	2
10	09 14 10 120 90	seal	1.00	2
3	09 14 10 139 90	seal	1.00	2
14	09 23 01 131 90	back-flow preventer	1.00	2
11	09 28 30 041-08	cover	1.00	40
16	09 24 03 281-08	nipple	1.00	40
1	09 24 77 002 90	nut	1.00	2
12	90 20 66 006 00-08	handle	1.00	40
13	09 31 11 144 90	pin	1.00	2
17	90 21 02 069 00-08	cover	1.00	40
2	90 31 11 030 00 90	pin	3.00	2