

ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette for spout 60 x 60mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

  ATTENTION: Separate terms and conditions for electronic articles are applicable.

### Individual components of this set

You need the following components for this set



1x 42 766 970 90

1x 13 800 980-00





ST 010 205 4980



ST 010 205 4980



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set

  Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.
  ATTENTION: Separate terms and conditions for

electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing

ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted fittings -

•max. recess depth 125 mm

•min. recess depth 90 mm

35 743 970 90



Required miscellaneous

eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings -


35 742 970 90


#### Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 205 4080 mm [inches]





### Certificates


LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou

chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.



ST 010 205 4980

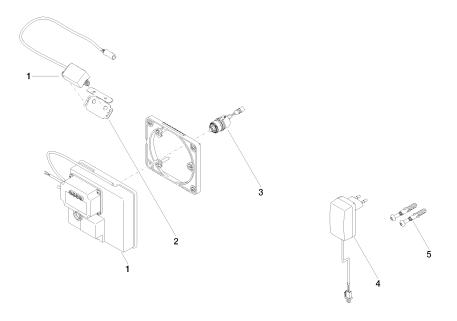

## Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
04 30 50 079 00 90	valve	1	2
04 10 01 050 00 90	power supply	1	60
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 04 30 50 079 00 90 04 10 01 050 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 04 30 50 079 00 90 valve 04 10 01 050 00 90 power supply	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 04 30 50 079 00 90 valve 1 04 10 01 050 00 90 power supply 1



ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette 60 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- WRAS 1904065

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

### Recommended miscellaneous

Concealed wall elbow -

35 085 970 90




•max. recess depth 163 mm •min. recess depth 90 mm




ST 010 205 4980



ST 010 205 4980 mm [inches]



### Flow rate chart




### Certificates

LGA\_18592.

WRAS\_1904065.



ST 010 205 4980



## Spare parts list

em Number	Name	Quantity used	Delivery time
14 10 053 90	seal	1	2
24 04 135 90	nipple	1	2
14 10 008 90	seal	2	2
11 68 004 00-00	spout	1	10
23 01 029 02-00	aerator	1	10
)	14 10 053 90 24 04 135 90 14 10 008 90 11 68 004 00-00	14 10 053 90 seal 24 04 135 90 nipple 14 10 008 90 seal 11 68 004 00-00 spout	14 10 053 90     seal     1       24 04 135 90     nipple     1       14 10 008 90     seal     2       11 68 004 00-00     spout     1