

Wall elbow - Dark Chrome

















SERIES SPECIFIC

28 450 625



- 3/8" shower outlet
- rosette Ø 55 mm
- 1/2" connection
- WRAS

Intrinsic protection against back flow.

| | | |
|---|-----------------------------------|---------------|
|  | Dark Chrome | 28 450 625-19 |
|  | Chrome | 28 450 625-00 |
|  | brushed chrome | 28 450 625-04 |
|  | Brushed Platinum | 28 450 625-06 |
|  | Platinum | 28 450 625-08 |
|  | Light Gold | 28 450 625-26 |
|  | Brushed Light Gold | 28 450 625-27 |
|  | Brushed Durabronze (23kt Gold) | 28 450 625-28 |
|  | Matte Black | 28 450 625-33 |
|  | Brushed Dark Brass | 28 450 625-39 |
|  | Brushed Bronze | 28 450 625-42 |
|  | aluminium | 28 450 625-45 |
|  | Brushed Champagne (22kt Gold) | 28 450 625-46 |
|  | Champagne (22kt Gold) | 28 450 625-47 |
|  | Brushed Chrome | 28 450 625-93 |
|  | Brushed Dark Platinum | 28 450 625-99 |

Recommended miscellaneous




Concealed wall elbow -

35 085 970 90


- max. recess depth 163 mm
- min. recess depth 90 mm

28 450 625

mm [inches]



Flow rate chart

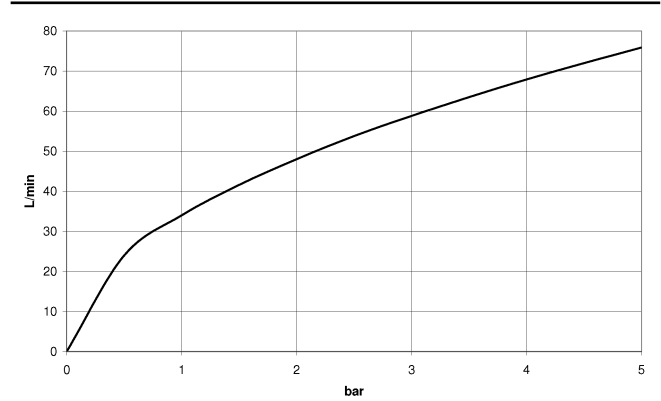

Codes & Standards

| | | | |
|----------------|------|---------|------------------------|
| ASME A112.18.1 | cUPC | EN 1717 | Scottish Water Byelaws |
|----------------|------|---------|------------------------|

UK Water Supply Regulations



Wall elbow - Dark Chrome

SERIES SPECIFIC

28 450 625

Certificates and sustainability

Belgaqua_21-381-2 IAPMO_4976 WRAS_240702

28 450 625

