






DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

33 845 110




- 237mm projection
  - pivotable spout 120°
  - air-enriched flow and spray flow
  - fabric braided hose 1500 mm
  - max. flow 8.8 l/min at 3 bar flow pressure
- Intrinsic protection against back flow.


	Soft Black	33 845 110-69
	Chrome	33 845 110-00
	Brushed Nickel	33 845 110-70

DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

33 845 110

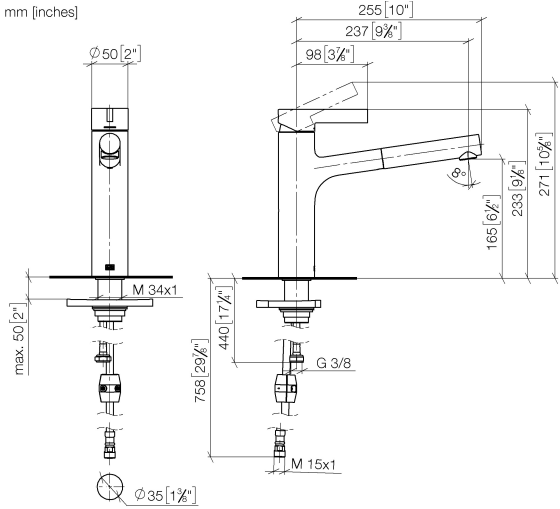

Flow rate chart

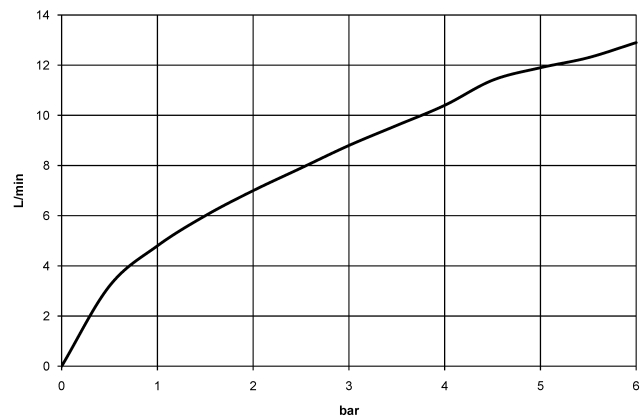

Codes & Standards

DIN 4109

EN 1717

EN 817

ISO 3822

Ü-Zeichen

XP P 41-280



## DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

---

33 845 110

### Certificates

---

Belgaqua\_23-012-2 AbP\_10


ACS\_23 ACC NY

DVGW\_DW-  
6506DN0

## DORNBRAUCHT LYV Single-lever mixer Pull-out - Soft Black

33 845 110

Parts for other  
finishes can be found  
here: [Chrome](#)

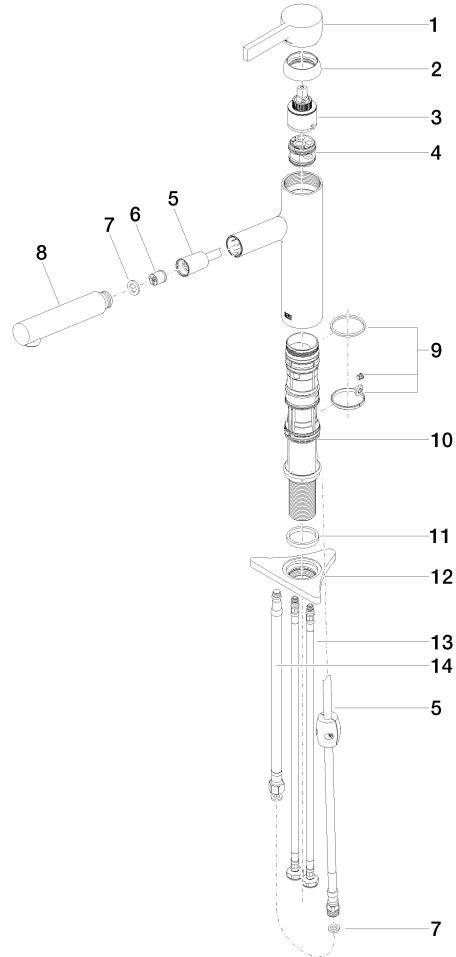



DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

33 845 110

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 20 81 001 00-69	handle	15	2