

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold **SERIES SPECIFIC**


36 503 780 Product version from 9/1/2022




- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 503 780-27
	Chrome	36 503 780-00
	Brushed Platinum	36 503 780-06
	Platinum	36 503 780-08
	Dark Chrome	36 503 780-19
	Brushed Durabronze (23kt Gold)	36 503 780-28
	Matte Black	36 503 780-33
	Brushed Champagne (22kt Gold)	36 503 780-46
	Champagne (22kt Gold)	36 503 780-47
	Brushed Chrome	36 503 780-93
	Brushed Dark Platinum	36 503 780-99


Required miscellaneous

	xTOOL Concealed thermostat module without volume control - • min. recess depth 115 mm • max. recess depth 155 mm	35 503 970 90
---	---	---------------

Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
---	--	---------------


Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
---	--	---------------


xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 780 Product version from 9/1/2022

mm [inches]

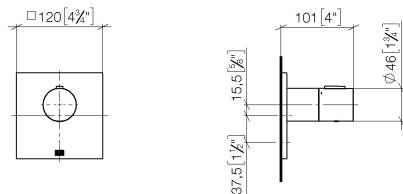

Flow rate chart

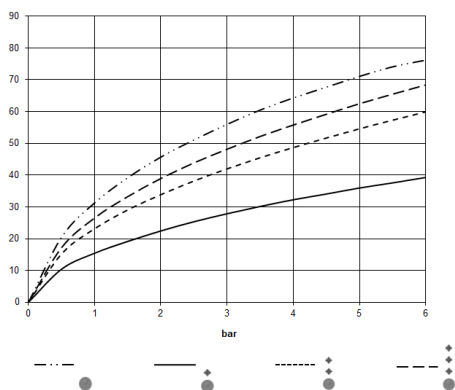

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 780 Product version from 9/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 780 Product version from 9/1/2022

