

Wall-mounted basin spout without pop-up waste - Dark Chrome

SERIES SPECIFIC

13 800 882



- 190mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- rosette Ø 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

For Touchfree control please order eSet Touchfree with temperature adjustment

| | | |
|---|-------------------------------|---------------|
|  | Dark Chrome | 13 800 882-19 |
|  | Chrome | 13 800 882-00 |
|  | Brushed Durabrass (23kt Gold) | 13 800 882-28 |
|  | Brushed Bronze | 13 800 882-42 |
|  | Brushed Champagne (22kt Gold) | 13 800 882-46 |
|  | Champagne (22kt Gold) | 13 800 882-47 |
|  | Brushed Chrome | 13 800 882-93 |
|  | Brushed Dark Platinum | 13 800 882-99 |

Recommended miscellaneous



- Concealed wall elbow -


•max. recess depth 163 mm

•min. recess depth 90 mm

35 085 970 90

13 800 882

mm [inches]

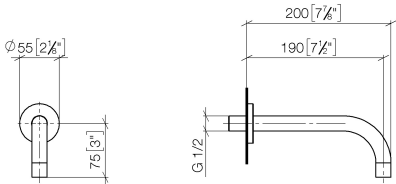

Flow rate chart



Codes & Standards

| | | | |
|----------|----------|------------------------|-----------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|------------------------|-----------------------------|

Ü-Zeichen



Wall-mounted basin spout without pop-up waste - Dark Chrome

SERIES SPECIFIC

13 800 882

Certificates and sustainability

LGA_29

WRAS_240602

13 800 882

