

META Hand shower set FlowReduce - Brushed Dark Brass



























META

27 805 625 Product version from 5/15/2020



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- spray head Ø 100mm
- three settings: normal flow, soft flow, massage flow
- with anti-scale system
- metal shower hose 1250mm with integrated anti-twist protection
- shower holder rosette Ø 55mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

	Brushed Dark Brass	27 805 625-39 0010
	Chrome	27 805 625-00
	Chrome	27 805 625-00 0010
	Brushed Platinum	27 805 625-06
	Brushed Platinum	27 805 625-06 0010
	Dark Chrome	27 805 625-19
	Dark Chrome	27 805 625-19 0010
	Light Gold	27 805 625-26 0010
	Light Gold	27 805 625-26
	Brushed Light Gold	27 805 625-27 0010
	Brushed Light Gold	27 805 625-27
	Brushed Durabrass (23kt Gold)	27 805 625-28
	Brushed Durabrass (23kt Gold)	27 805 625-28 0010
	Matte Black	27 805 625-33 0010
	Matte Black	27 805 625-33
	Brushed gold (PVD)	27 805 625-37
	Brushed Dark Brass	27 805 625-39
	Brushed Bronze	27 805 625-42 0010
	Brushed Bronze	27 805 625-42
	Brushed Champagne (22kt Gold)	27 805 625-46
	Brushed Champagne (22kt Gold)	27 805 625-46 0010
	Champagne (22kt Gold)	27 805 625-47
	Champagne (22kt Gold)	27 805 625-47 0010
	Brushed Chrome	27 805 625-93
	Brushed Chrome	27 805 625-93 0010
	Brushed Dark Platinum	27 805 625-99

META Hand shower set FlowReduce - Brushed Dark Brass

META

27 805 625


Product version from 5/15/2020



Brushed Dark
Platinum

27 805 625-99 0010

Recommended miscellaneous



Concealed wall elbow -
 •min. recess depth 90 mm
 •max. recess depth 163 mm

35 085 970 90


Recommended miscellaneous



Wall elbow - Brushed Dark Brass

28 450 625-39

mm [inches]

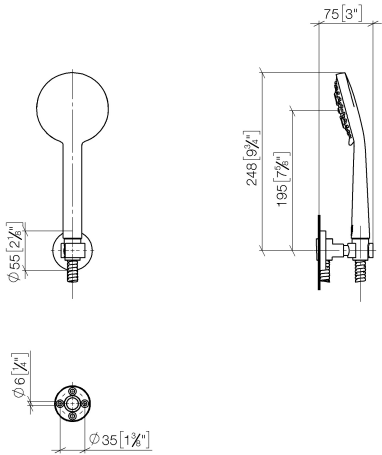

Codes & Standards

DIN 4109	ISO 3822	Ü-Zeichen
----------	----------	-----------

Certificates and sustainability

LGA_29

