

SERIES SPECIFIC Hand shower set FlowReduce - Dark Chrome























SERIES SPECIFIC

27 806 625




- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- rosette Ø 55 mm
- metal shower hose 1250mm with integrated anti-twist protection
- shower holder rosette Ø 55mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.


| | | |
|---|--------------------------------|--------------------|
|  | Dark Chrome | 27 806 625-19 0010 |
|  | Chrome | 27 806 625-00 |
|  | Chrome | 27 806 625-00 0010 |
|  | Brushed Platinum | 27 806 625-06 |
|  | Brushed Platinum | 27 806 625-06 0010 |
|  | Dark Chrome | 27 806 625-19 |
|  | Light Gold | 27 806 625-26 0010 |
|  | Light Gold | 27 806 625-26 |
|  | Brushed Light Gold | 27 806 625-27 0010 |
|  | Brushed Light Gold | 27 806 625-27 |
|  | Brushed Durabronze (23kt Gold) | 27 806 625-28 |
|  | Brushed Durabronze (23kt Gold) | 27 806 625-28 0010 |
|  | Matte Black | 27 806 625-33 |
|  | Matte Black | 27 806 625-33 0010 |
|  | Brushed Bronze | 27 806 625-42 |
|  | Brushed Bronze | 27 806 625-42 0010 |
|  | Brushed Champagne (22kt Gold) | 27 806 625-46 |
|  | Brushed Champagne (22kt Gold) | 27 806 625-46 0010 |
|  | Champagne (22kt Gold) | 27 806 625-47 |
|  | Champagne (22kt Gold) | 27 806 625-47 0010 |
|  | Brushed Chrome | 27 806 625-93 |
|  | Brushed Chrome | 27 806 625-93 0010 |
|  | Brushed Dark Platinum | 27 806 625-99 |
|  | Brushed Dark Platinum | 27 806 625-99 0010 |

27 806 625


Recommended miscellaneous

| | | |
|---|--|---------------|
|  | Concealed wall elbow - •max. recess depth 163 mm •min. recess depth 90 mm | 35 085 970 90 |
|---|--|---------------|

Recommended miscellaneous

| | | |
|---|---------------------------------|---------------|
|  | Wall elbow - Dark Chrome | 28 450 625-19 |
|---|---------------------------------|---------------|

27 806 625

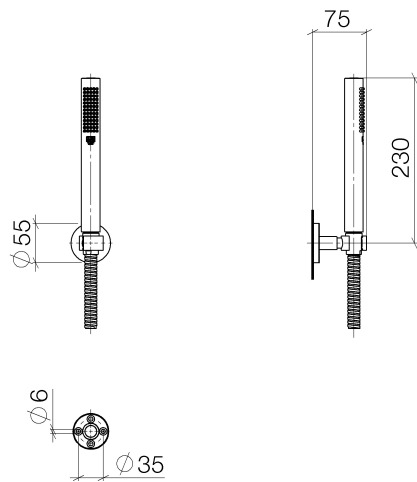

Codes & Standards

| | | | |
|----------------|------|----------|----------|
| ASME A112.18.1 | cUPC | DIN 4109 | ISO 3822 |
|----------------|------|----------|----------|

Ü-Zeichen

Certificates and sustainability

| | |
|--------|------------|
| LGA_29 | IAPMO_4976 |
|--------|------------|

27 806 625

