

**Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold)**

IMO

28 044 980



Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Provided by customer: Zigbee gateway
- Not suitable for use in a steam room.
- WRAS 240502006

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

|  |                               |               |
|--|-------------------------------|---------------|
|  | Brushed Durabronz (23kt Gold) | 28 044 980-28 |
|  | Chrome                        | 28 044 980-00 |
|  | Brushed Platinum              | 28 044 980-06 |
|  | Platinum                      | 28 044 980-08 |
|  | Dark Chrome                   | 28 044 980-19 |
|  | Brushed Light Gold            | 28 044 980-27 |
|  | Matte Black                   | 28 044 980-33 |
|  | Brushed Champagne (22kt Gold) | 28 044 980-46 |
|  | Champagne (22kt Gold)         | 28 044 980-47 |
|  | Brushed Chrome                | 28 044 980-93 |
|  | Brushed Dark Platinum         | 28 044 980-99 |

**Required miscellaneous**




**Concealed ceiling installation box for recessed ceiling installation with light -** 35 044 970 90

- flush-mounted installation box 360x 300 mm RAL 9003 signal white
- recess depth 137mm
- Supply pipe 7 m
- concealed rough parts
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class II
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway


**Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold)**

IMO

28 044 980  
mm [inches]

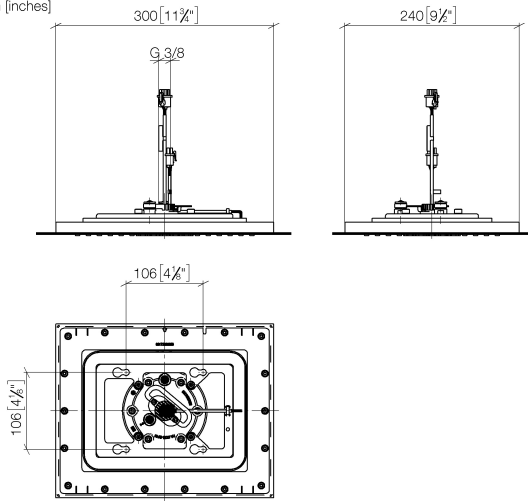

**Flow rate chart**

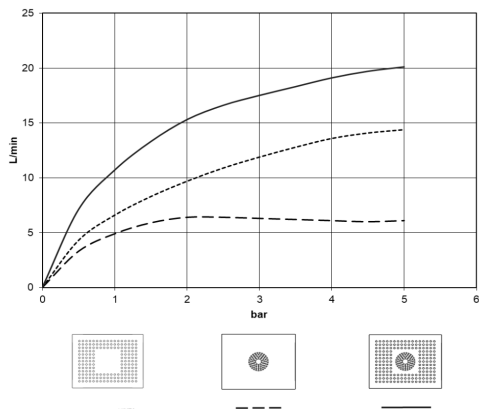

**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed  
Durabronze (23kt Gold)

---

IMO

28 044 980

Certificates

---


LGA\_38

WRAS\_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed  
Durabronze (23kt Gold)

28 044 980

Product version from 5/1/2022

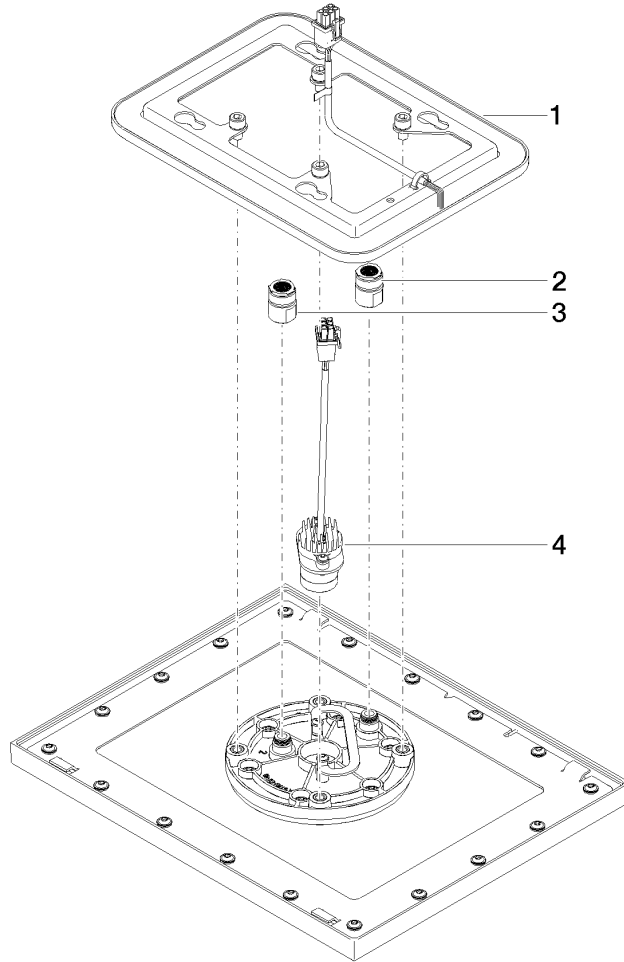



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed  
Durabronze (23kt Gold)

IMO

28 044 980

### Spare parts list

#### Product version from 5/1/2022

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
|     | 90 10 01 224 00 90 | electronic accessories | 4             | 2             |