



33 505 811



- 177mm projection
- fixed spout
- rectangular, air-enriched flow
- height of mixer 198 mm
- height up to aerator 133 mm
- hole diameter 35 mm
- 2x screw-in M 8 x 1 pressure hose, leak-tested
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 WRAS 2111040

Only suitable for basins with an overflow.

Must not be combined with continuous-flow heaters heaters.


Distance from centre of tap hole to wall min. 55 mm or to front edge of basin min. 40 mm.

Brushed Dark Platinum	33 505 811-99
Chrome	33 505 811-00
Brushed Platinum	33 505 811-06
Dark Chrome	33 505 811-19
Brushed Durabrass (23kt Gold)	33 505 811-28


7/29/2024



33 505 811



Flow rate chart



Codes & Standards

DIN 4109 Executive Order ISO 3822 Scottish Water no. 1007 Byelaws

UK Water Supply Regulations

Ü-Zeichen



CYO

33 505 811

Certificates

WRAS_2111


LGA_38

GDV_0400



33 505 811

Parts for other finishes can be found here: Chrome

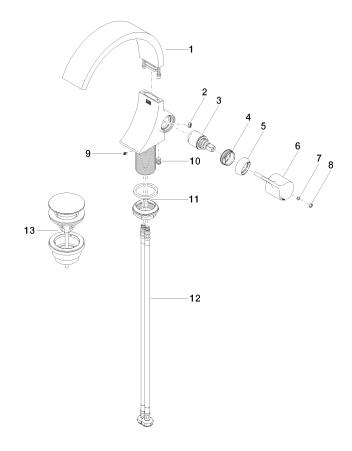

7/29/2024





33 505 811

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 11 70 013 01-99	spout	14	30