

17 861 875



- 146mm projection
- rigid, thermally insulated spout
- laminar flow
- height of mixer 288 mm
- height up to laminar flow regulator 180 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free

- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

In addition, the installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.


Detailed planning information and technical data can be found at www.dornbracht.com/professional

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

In addition, the installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional


| | | |
|--|-------------------------------|---------------|
|  | Brushed Dark Platinum | 17 861 875-99 |
|  | Chrome | 17 861 875-00 |
|  | Brushed Platinum | 17 861 875-06 |
|  | Platinum | 17 861 875-08 |
|  | Durabrand (23kt Gold) | 17 861 875-09 |
|  | Dark Chrome | 17 861 875-19 |
|  | Brushed Durabrand (23kt Gold) | 17 861 875-28 |
|  | Matte Black | 17 861 875-33 |
|  | Brushed Champagne (22kt Gold) | 17 861 875-46 |
|  | Champagne (22kt Gold) | 17 861 875-47 |
|  | Brushed Chrome | 17 861 875-93 |

Required miscellaneous



Hot water tank incl. filter -

12 892 970 90

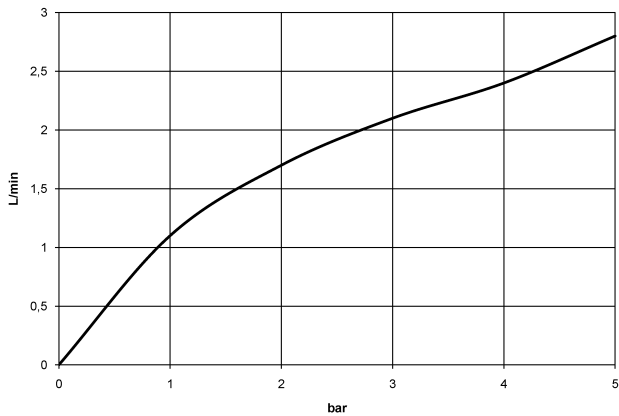[illegible]

| | | | |
|----------------|--------|----------|-----------------------------|
| ASME A112.18.1 | cUPC | DIN 4109 | Executive Order no. 1007 |
| ISO 3822 | NSF372 | NSF61 | Ü-Zeichen |



TARA ULTRA HOT & COLD WATER DISPENSER - Brushed Dark Platinum

TARA ULTRA

17 861 875

Certificates


| | | | | |
|----------|------------|-----------|--------|---------|
| GDV_0400 | IAPMO_4976 | IAPMO_N-4 | LGA_28 | IAPMO_6 |
|----------|------------|-----------|--------|---------|

17 861 875

Product version from 4/1/2014 to 5/27/2021

Product version from 5/27/2021 to 5/28/2022

Product version from 5/28/2022

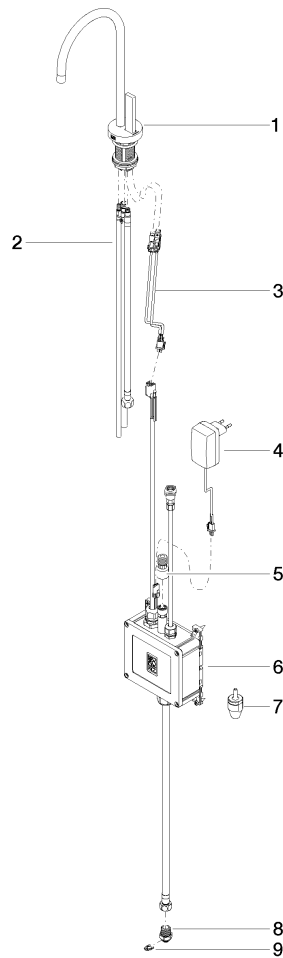



TARA ULTRA HOT & COLD WATER DISPENSER - Brushed Dark Platinum

TARA ULTRA

17 861 875

Spare parts list

Product version from 4/1/2014 to 5/27/2021

Product version from 5/27/2021 to 5/28/2022

Product version from 5/28/2022

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|---------|---------------|---------------|
| | 90 17 85 100 05-99 | fitting | 9 | 30 |