



Concealed single-lever mixer -

35 020 970 90



- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- 2x integrated supply stop
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 60 mm
- WRAS 2207012

Recommended miscellaneous

Extension 25 mm - 12 191 970 90



Recommended miscellaneous

Extension 25 mm - 12 190 970 90



Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90



Required miscellaneous


xGRID Installation track 555 mm - 12 360 970 90




Concealed single-lever mixer -

35 020 970 90

mm [inches]

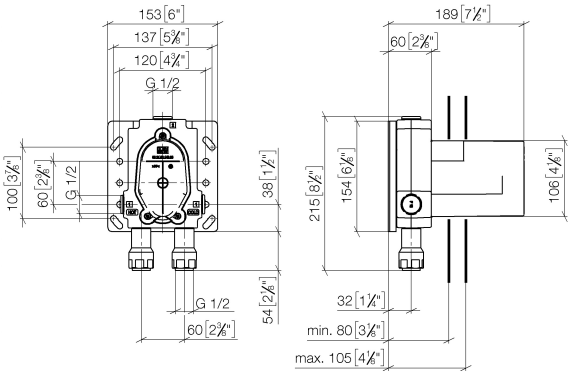

Flow rate chart

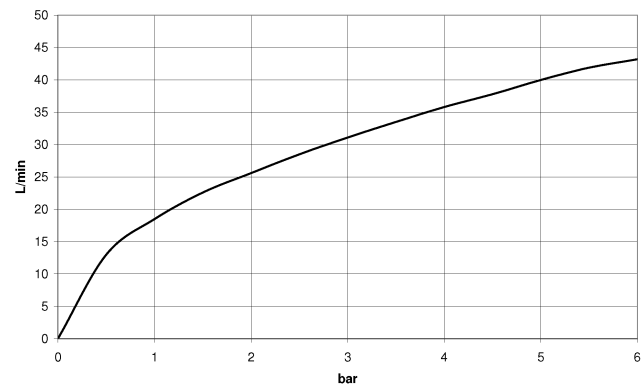

Codes & Standards

DIN 4109	EN 817	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



## Concealed single-lever mixer -

---

35 020 970 90

### Certificates

---


DVGW\_DW-  
6512DN0

WRAS\_2207

LGA\_19

## Concealed single-lever mixer -

35 020 970 90

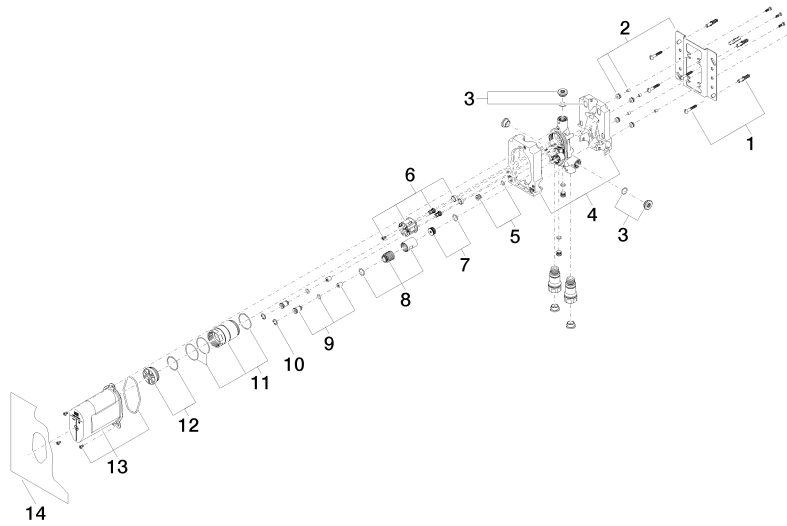



Concealed single-lever mixer -

35 020 970 90

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	04 30 31 024 01 90	fixing set	18	2