


xTOOL Concealed thermostat module with 1 valve -

35 511 970 90




- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 1x female thread 3/4" outlet, right/left alternatively
- 2x dust cover
- 2x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS 2011026


Recommended miscellaneous

	Extension 46 mm -	12 178 970 90
		


Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
		

Recommended miscellaneous

	Extension 28 mm -	12 177 970 90
		


Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
		

xTOOL Concealed thermostat module with 1 valve -

35 511 970 90

mm [inches]
1:10

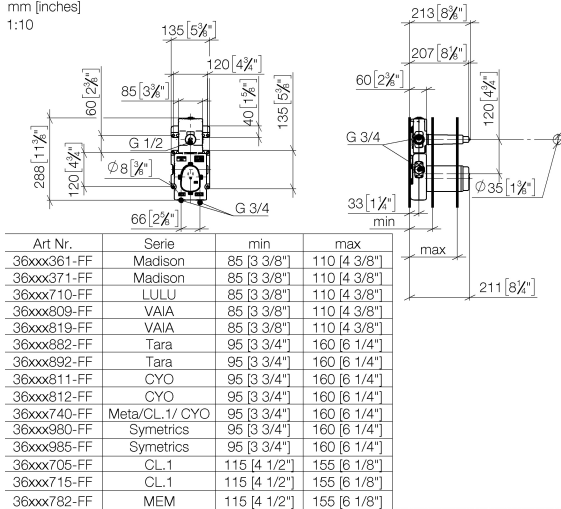

Codes & Standards

EN 1111

EN 1717

Scottish Water
Byelaws

UK Water Supply
Regulations

XP P 41-280

Certificates

ACS_21 ACC LY

Belgaqua_21-031-2

DVGW_DW-
6512DN0


WRAS_2011

xTOOL Concealed thermostat module with 1 valve -

35 511 970 90

Product version up to 11/25/2021

Product version from 1/1/2022

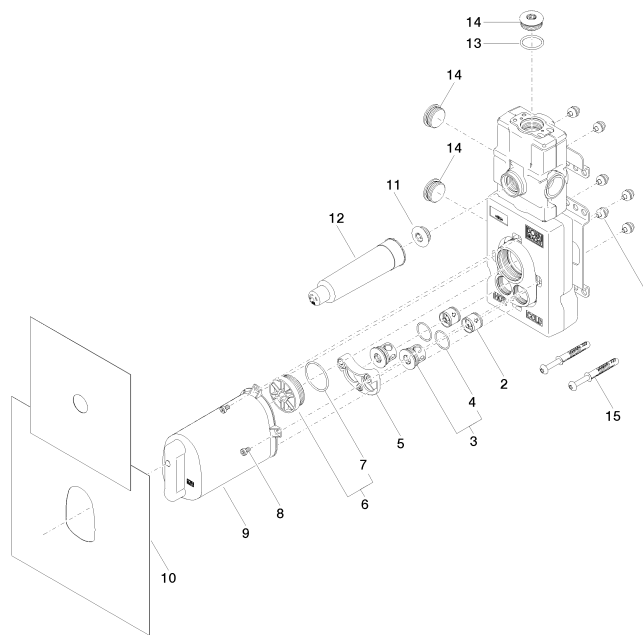



xTOOL Concealed thermostat module with 1 valve -

35 511 970 90

Spare parts list

Product version up to 11/25/2021

Product version from 1/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 23 01 091 00 90	set	29	2