








MADISON Concealed thermostat with two function volume control - Durabrass (23kt Gold)
MADISON


36 426 977
Product version up to 8/24/2020




- rotary diverter with volume control and shut-off function
- cover plate Ø 175 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

| | | |
|---|-------------------------------|---------------|
|  | Durabrass (23kt Gold) | 36 426 977-09 |
|  | Chrome | 36 426 977-00 |
|  | Brushed Platinum | 36 426 977-06 |
|  | Platinum | 36 426 977-08 |
|  | Brushed Durabrass (23kt Gold) | 36 426 977-28 |
|  | Brushed Dark Brass | 36 426 977-39 |
|  | Brushed Dark Platinum | 36 426 977-99 |


Required miscellaneous

| | | |
|---|--|---------------|
|  | Concealed thermostat - •min. recess depth 80 mm •max. recess depth 136 mm | 35 425 970 90 |
|---|--|---------------|


Recommended miscellaneous

| | | |
|---|--|---------------|
|  | xGRID Attachment set for integrating in the dry wall construction - | 12 340 970 90 |
|---|--|---------------|

Required miscellaneous

| | | |
|---|--|---------------|
|  | Concealed thermostat with built-in isolators - •min. recess depth 80 mm •max. recess depth 136 mm | 35 426 970 90 |
|---|--|---------------|


Required miscellaneous

| | | |
|---|--|---------------|
|  | xGRID Installation track 555 mm - | 12 360 970 90 |
|---|--|---------------|


MADISON Concealed thermostat with two function volume control - Durabrass (23kt Gold)

MADISON

36 426 977 Product version up to 8/24/2020
mm [inches]

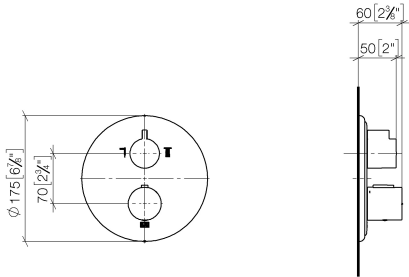

Flow rate chart

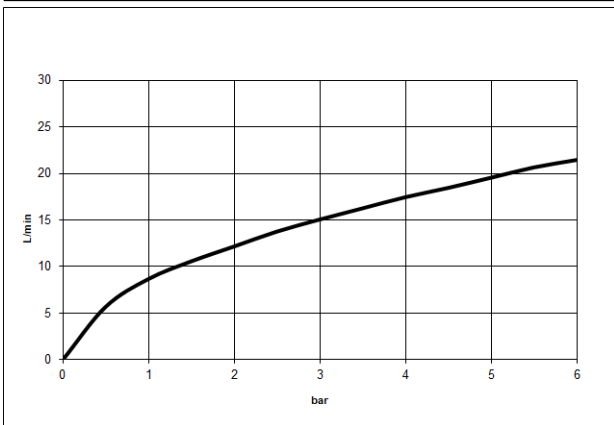

Codes & Standards

| | | | |
|-----------------------------|-----------|------------|------------------------|
| DIN 4109 | EN 1111 | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen | VA-Zeichen | XP P 41-280 |



MADISON Concealed thermostat with two function volume control - Durabrass
(23kt Gold)

MADISON

36 426 977 Product version up to 8/24/2020


Certificates and sustainability

| | | | | |
|---------------|--------|--------|---------------------|--------|
| ACS_20 ACC LY | LGA_19 | ETA_20 | DVGW_DW- 6512DN0 | LGA_19 |
| WRAS_250402 | | | | |

MADISON Concealed thermostat with two function volume control - Durabrass (23kt Gold)

MADISON

36 426 977 Product version up to 8/24/2020

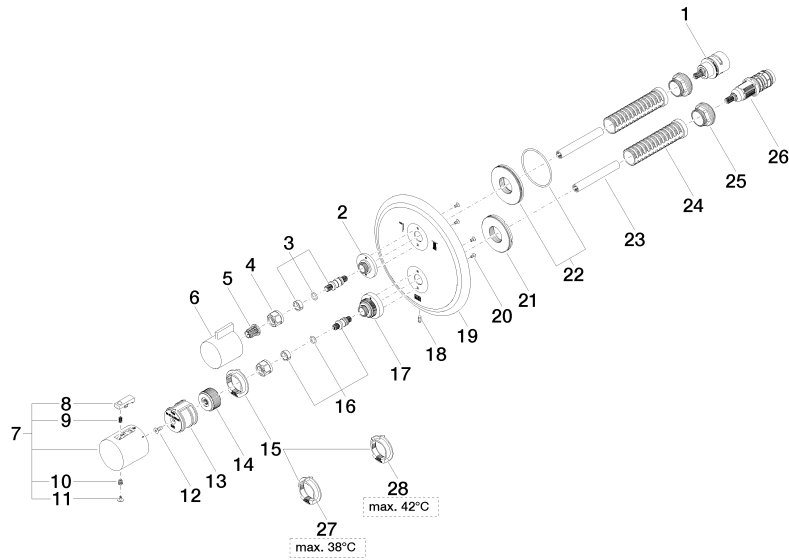



MADISON Concealed thermostat with two function volume control - Durabrass (23kt Gold)

MADISON

36 426 977 Product version up to 8/24/2020

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 28 | 09 28 10 151 90 | regulator | 1.00 | 60 |
| 15 | 09 28 10 143 90 | regulator | 1.00 | 60 |
| 25 | 09 24 04 257 90 | nut | 2.00 | 2 |
| 5 | 90 12 12 002 00 90 | fixing cap | 1.00 | 2 |
| 21 | 09 30 01 296 90 | disc | 1.00 | 2 |
| 1 | 90 90 03 163 00 90 | diverter | 1.00 | 2 |
| 17 | 09 12 12 051-09 | base | 1.00 | 60 |
| 20 | 09 30 30 157 90 | screw | 4.00 | 2 |
| 7 | 90 17 33 004 00-09 | handle | 1.00 | 40 |
| 19 | 09 11 02 308-09 | plate | 1.00 | 60 |
| 2 | 09 12 12 053-09 | base | 1.00 | 60 |
| 18 | 09 31 11 134 90 | pin | 1.00 | 2 |
| 14 | 09 12 12 054 90 | base | 1.00 | 2 |
| 9 | 90 16 02 027 00 90 | spring | 1.00 | 2 |
| 22 | 90 30 01 190 00 90 | disc | 1.00 | 2 |
| 6 | 09 20 67 006-09 | handle | 1.00 | 60 |
| 26 | 90 15 02 012 00 90 | cartridge | 1.00 | 60 |
| 27 | 09 28 10 150 90 | regulator | 1.00 | 60 |
| 24 | 90 18 40 077 01 90 | spindle | 2.00 | 2 |
| 4 | 90 23 30 023 00 90 | nut | 2.00 | 2 |
| 13 | 90 12 12 052 00 90 | base | 1.00 | 2 |
| 12 | 90 30 30 124 00 90 | screw | 1.00 | 2 |
| 23 | 90 23 01 124 00 90 | sleeve | 2.00 | 2 |
| 10 | 90 30 30 136 00 90 | screw | 1.00 | 2 |
| 16 | 04 29 06 024 01-00 | spindle | 1.00 | 10 |
| 3 | 04 29 06 111 01-00 | spindle | 1.00 | 10 |
| 11 | 90 31 20 049 00-13 | plug | 1.00 | 30 |
| 8 | 90 21 33 011 00-13 | handle | 1.00 | 2 |