


TARA ULTRA HOT & COLD WATER DISPENSER - Chrome

TARA ULTRA

17 861 875 Product version from 4/1/2014 to 5/27/2021



- 146mm projection
 - rigid, thermally insulated spout
 - laminar flow
 - height of mixer 288 mm
 - height up to laminar flow regulator 180 mm
 - hole diameter 35 mm
 - provides filtered, hot water up to 93°C
 - provides filtered, cold water
 - max. flow 2 l/min at 3 bar flow pressure
 - ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
 - electronic magnetic valve
 - 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
 - lead-free
 - Spout ring cannot be removed.
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.**
- The installation must be above a kitchen sink.**
- The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.**
- Detailed planning information and technical data can be found at www.dornbracht.com/professional**
- Not compatible with reverse osmosis filtration**

| | | |
|---|-------------------------------|---------------|
|  | Chrome | 17 861 875-00 |
|  | Brushed Platinum | 17 861 875-06 |
|  | Platinum | 17 861 875-08 |
|  | Durabrand (23kt Gold) | 17 861 875-09 |
|  | Dark Chrome | 17 861 875-19 |
|  | Brushed Durabrand (23kt Gold) | 17 861 875-28 |
|  | Matte Black | 17 861 875-33 |
|  | Brushed Champagne (22kt Gold) | 17 861 875-46 |
|  | Champagne (22kt Gold) | 17 861 875-47 |
|  | Brushed Chrome | 17 861 875-93 |
|  | Brushed Dark Platinum | 17 861 875-99 |

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

The installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional

Not compatible with reverse osmosis filtration


Required miscellaneous




Hot water tank incl. filter -

12 892 970 90

17 861 875 Product version from 4/1/2014 to 5/27/2021

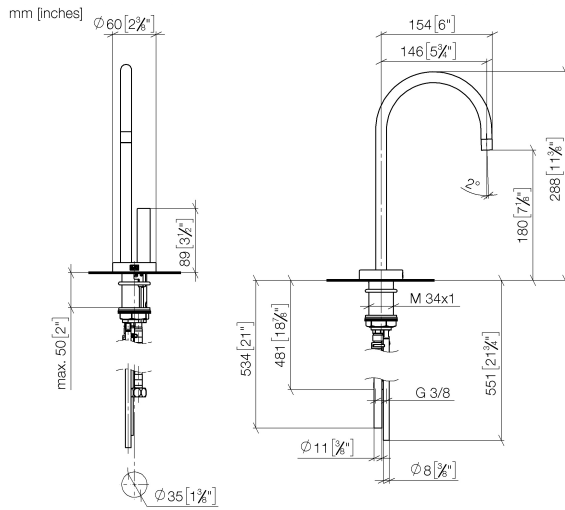

Flow rate chart

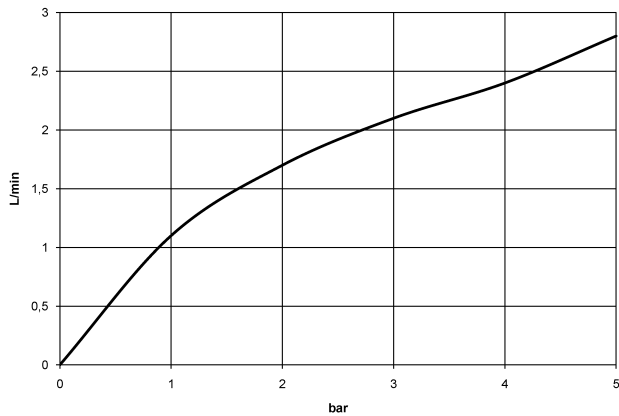

Codes & Standards

| | | | |
|----------------|--------|----------|-----------------------------|
| ASME A112.18.1 | cUPC | DIN 4109 | Executive Order no. 1007 |
| ISO 3822 | NSF372 | NSF61 | Ü-Zeichen |



TARA ULTRA HOT & COLD WATER DISPENSER - Chrome

TARA ULTRA

17 861 875 Product version from 4/1/2014 to 5/27/2021

Certificates and sustainability

| | | | | |
|-----------|------------|----------|--------|---------|
| IAPMO_N-4 | IAPMO_4976 | GDV_0400 | LGA_28 | IAPMO_6 |
|-----------|------------|----------|--------|---------|

17 861 875 Product version from 4/1/2014 to 5/27/2021



Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 17 85 100 05-00 | fitting | 1.00 | 10 |
| 3 | 90 10 01 048 00 90 | electronic accessories | 1.00 | 2 |
| 8 | 09 16 01 045 90 | ring | 1.00 | 2 |
| 2 | 90 30 04 067 00 90 | hose | 1.00 | 2 |
| 6 | 90 24 04 291 00 90 | insert | 1.00 | 2 |
| 7 | 09 24 04 293 90 | nipple | 1.00 | 2 |
| 4 | 04 10 01 050 00 90 | power supply | 1.00 | 60 |
| 5 | 90 11 11 064 01 90 | electronic accessories | 1.00 | 2 |