

TARA Deck valve clockwise closing cold or hot - Brushed Champagne (22kt Gold)

TARA

20 000 892

Product version from 4/1/2025




- hole diameter 32 mm
- rosette Ø 55 mm
- WRAS

	Brushed Champagne (22kt Gold)	20 000 892-46
	Chrome	20 000 892-00
	Brushed Platinum	20 000 892-06
	Platinum	20 000 892-08
	Dark Chrome	20 000 892-19
	Brushed Durabronze (23kt Gold)	20 000 892-28
	Matte Black	20 000 892-33
	Brushed Dark Brass	20 000 892-39
	Brushed Bronze	20 000 892-42
	Champagne (22kt Gold)	20 000 892-47
	Brushed Chrome	20 000 892-93
	Brushed Dark Platinum	20 000 892-99


TARA Deck valve clockwise closing cold or hot - Brushed Champagne (22kt Gold)

TARA

20 000 892 Product version from 4/1/2025
mm [inches]

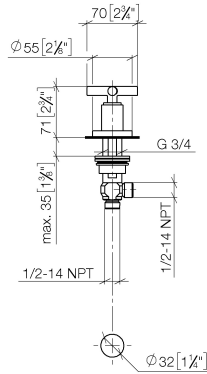

Flow rate chart

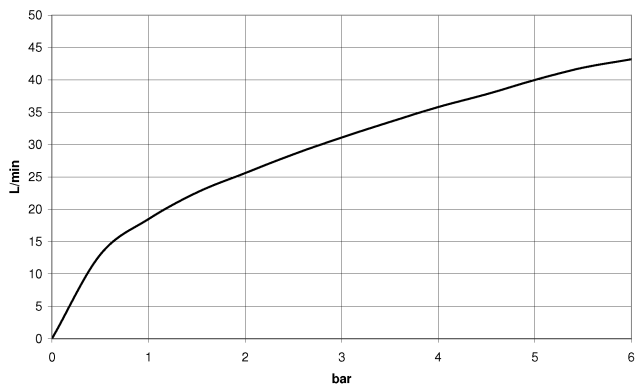

Codes & Standards

ASME A112.18.1

cUPC

Scottish Water
Byelaws

UK Water Supply
Regulations



TARA Deck valve clockwise closing cold or hot - Brushed Champagne (22kt Gold)

TARA

20 000 892 Product version from 4/1/2025

Certificates and sustainability

WRAS_2112

IAPMO_4976

This diagram illustrates the exploded view of a water filter assembly. The components are numbered as follows:

- 1**: The main housing, which includes the top cap (2), the filter body (3), and the bottom cap (4).
- 2**: The top cap, which is a cross-shaped plastic piece.
- 3**: The filter body, a cylindrical component that houses the filter media.
- 4**: The bottom cap, a small plastic piece that fits into the bottom of the filter body.
- 5**: A small screw or pin that secures the bottom cap to the filter body.
- 6**: The filter media, a cylindrical mesh or pleated filter element.
- 7**: The top O-ring, a circular seal that fits between the top cap and the filter body.
- 8**: The bottom O-ring, a circular seal that fits between the filter body and the bottom cap.
- 9**: The inlet/outlet fitting, a threaded component that connects the filter assembly to the water supply line.

4/4 7/4/2025