


TARA Two-hole bath mixer for free-standing assembly with hand shower set - Champagne (22kt Gold)

TARA

25 943 882 Product version from 5/27/2021



- 220mm projection
- pivotable spout 180°
- spout: circular, air-enriched flow
- Hand shower: COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- hand shower with anti-scale system
- rotary diverter for bath/shower
- total height 920 mm
- stand pipes height 628 mm
- height up to aerator 765 mm
- slide-on rosettes Ø 90 mm
- gauge 150 mm
- metal shower hose 1250mm with integrated anti-twist protection
- pivotable shower holder on the right foot
- max. flow 22 l/min at 3 bar flow pressure
- WRAS

Intrinsic protection against back flow.

Intrinsic protection against back flow.

| | | |
|--|--------------------------------|---------------|
| | Champagne (22kt Gold) | 25 943 882-47 |
| | Chrome | 25 943 882-00 |
| | Brushed Platinum | 25 943 882-06 |
| | Platinum | 25 943 882-08 |
| | Dark Chrome | 25 943 882-19 |
| | Brushed Durabronze (23kt Gold) | 25 943 882-28 |
| | Matte Black | 25 943 882-33 |
| | Brushed Dark Brass | 25 943 882-39 |
| | Brushed Bronze | 25 943 882-42 |
| | Brushed Champagne (22kt Gold) | 25 943 882-46 |
| | Brushed Chrome | 25 943 882-93 |
| | Brushed Dark Platinum | 25 943 882-99 |

Required miscellaneous



Concealed floor mounting -

35 944 970 90


- min. recess depth 80 mm
- max. recess depth 160 mm

TARA Two-hole bath mixer for free-standing assembly with hand shower set - Champagne (22kt Gold)

TARA

25 943 882 Product version from 5/27/2021

mm [inches]

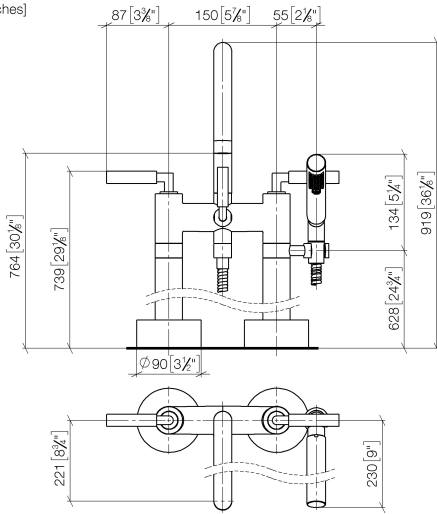

Flow rate chart



Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



TARA Two-hole bath mixer for free-standing assembly with hand shower set -
Champagne (22kt Gold)

TARA

25 943 882 Product version from 5/27/2021

Certificates and sustainability

WRAS_2212 LGA_18 IAPMO_4976 (

TARA Two-hole bath mixer for free-standing assembly with hand shower set - Champagne (22kt Gold)

TARA

25 943 882 Product version from 5/27/2021

