

MADISON Shower set without hand shower - Brushed Durabrand (23kt Gold)

MADISON

26 413 370 Product version from 7/1/2025



- shower hose connector 1/2"
- metal shower hose 1750mm with integrated anti-twist protection
- slide bar

Technical data:

- gauge 850 mm
- rosettes Ø 60 mm
- Pipe diameter 18 mm

Notes:

- WRAS

This article does not include a hand shower!

	Brushed Durabrand (23kt Gold)	26 413 370-28
	Chrome	26 413 370-00
	Brushed Platinum	26 413 370-06
	Platinum	26 413 370-08
	Durabrand (23kt Gold)	26 413 370-09
	Brushed Dark Brass	26 413 370-39
	Brushed Dark Platinum	26 413 370-99

Recommended miscellaneous



- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
 - max. recess depth 163 mm

Required miscellaneous



- MADISON Metal hand shower with porcelain insert (white)** 28 002 970-28
FlowReduce - Brushed Durabrand (23kt Gold) 0010

Required miscellaneous



- MADISON Hand shower - Brushed Durabrand (23kt Gold)** 28 002 978-28
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate l/min (at 3 bar)
 - spray head Ø 95mm
 - Hand shower see page {PAGE}

Required miscellaneous




- MADISON Hand shower FlowReduce - Brushed Durabrand (23kt Gold)** 28 002 978-28
 0010
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate l/min (at 3 bar)
 - spray head Ø 95mm
 - Hand shower see page {PAGE}

Recommended miscellaneous



- MADISON Wall elbow - Brushed Durabrand (23kt Gold)** 28 450 370-28

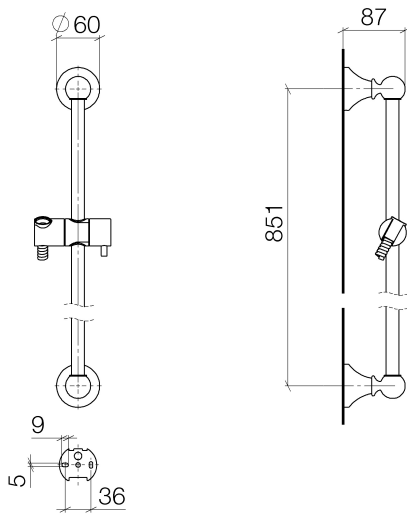


Codes & Standards

Scottish Water
Byelaws

UK Water Supply
Regulations

Certificates and sustainability

WRAS_2009

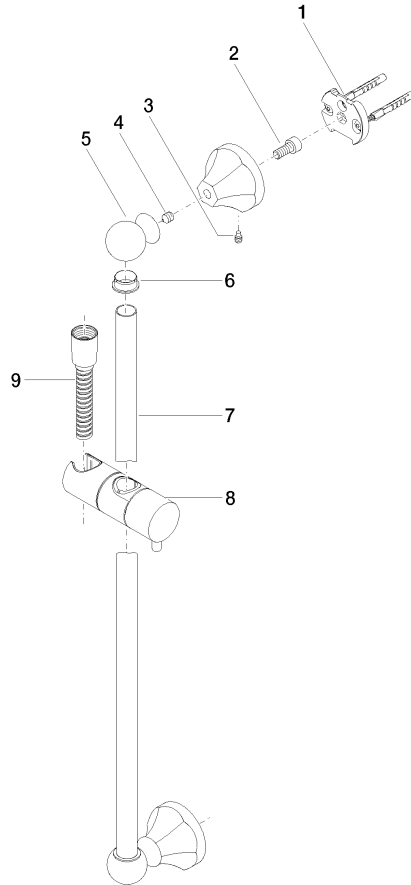

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	05 17 97 507 00 90	fixing set	2.00	2
8	12 580 970-28	Slide unit - Brushed Durabronz (23kt Gold)	1.00	20
9	28 204 970-28	Metal shower hose 1/2" x 1/2" x 1750 mm - Brushed Durabronz (23kt Gold)	1.00	2
3	09 31 11 140 90	pin	2.00	60
6	09 18 40 009 90	sleeve	2.00	2
7	08 28 22 596-28	pipe	1.00	20
4	09 31 11 002 90	pin	2.00	2
5	09 21 40 020-28	connection	2.00	20
2	09 30 30 048 90	screw	2.00	2