











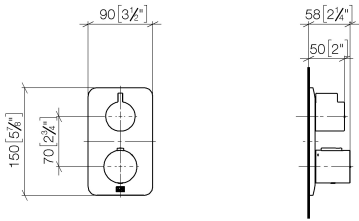
LISSE

Concealed thermostat with one function volume control - Brushed Light Gold


LISSE

36 425 845    Product version from 6/30/2022			
	<ul style="list-style-type: none"> <li>cover plate 150 x 90 mm</li> <li>temperature control handle with safety limit stop at 38°C</li> <li>hot water temperature limiter, can be preset</li> <li>WRAS</li> </ul>		
		Brushed Light Gold	36 425 845-27
		Chrome	36 425 845-00
		Brushed Platinum	36 425 845-06
		Dark Chrome	36 425 845-19
		Matte Black	36 425 845-33
		Brushed Chrome	36 425 845-93
		Brushed Dark Platinum	36 425 845-99

Recommended miscellaneous		Required miscellaneous	
	xGRID Attachment set for integrating in the dry wall construction -		xGRID Installation track 555 mm -
	12 340 970 90		12 360 970 90



Flow rate chart

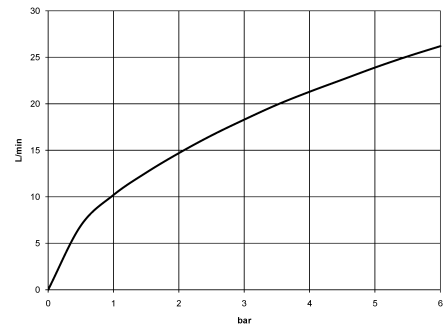

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen	VA-Zeichen	



LISSE Concealed thermostat with one function volume control - Brushed Light Gold

LISSE

36 425 845 Product version from 6/30/2022

Certificates and sustainability

LGA_19	ETA_20	DVGW_DW-6512DN0	LGA_19	WRAS_250402
--------	--------	-----------------	--------	-------------

# LISSÉ Concealed thermostat with one function volume control - Brushed Light Gold

LISSÉ

36 425 845 Product version from 6/30/2022

