

35 425 970 90



- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- WRAS

Required miscellaneous



xGRID Installation track 555 mm -

12 360 970 90

Recommended miscellaneous




xGRID Attachment set for
integrating in the dry wall
construction -

12 340 970 90

35 425 970 90

mm [inches]

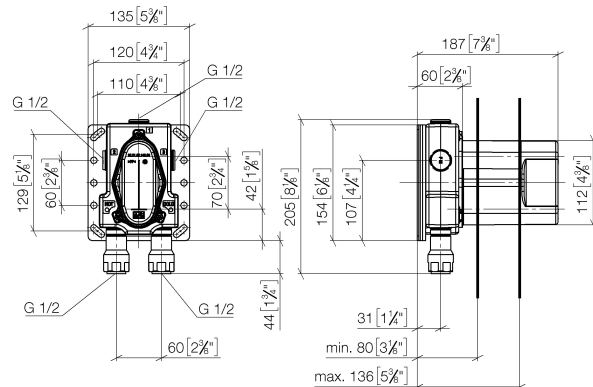

Codes & Standards

EN 1111

EN 1717

Scottish Water
Byelaws

UK Water Supply
Regulations

VA-Zeichen


Certificates and sustainability

Belgaqua_21-031-2 ETA_20

DVGW_DW-
6512DN0

WRAS_250402

35 425 970 90

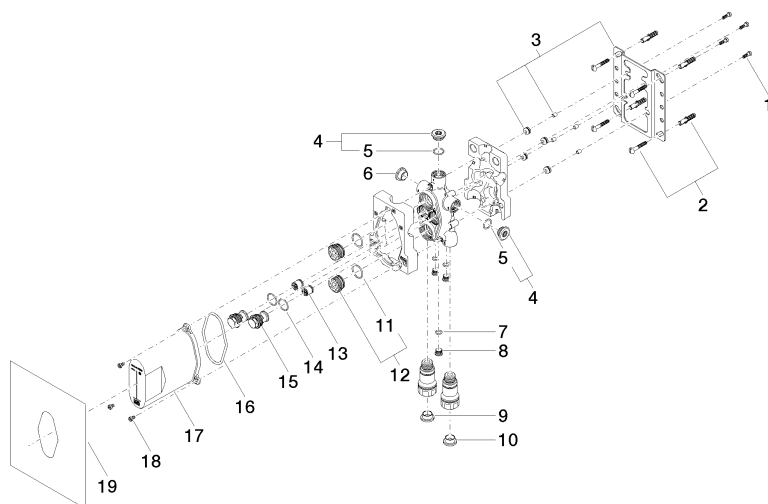

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|-----------------------|---------------------|---------------|---------------|
| | 15 09 24 03 219 90 | nipple | 2.00 | 2 |
| | 19 04 14 03 080 00 90 | gasket kit | 1.00 | 2 |
| | 13 90 23 01 040 00 90 | back-flow preventer | 2.00 | 2 |
| | 16 09 14 10 512 90 | seal | 1.00 | 2 |
| | 7 09 14 10 139 90 | seal | 3.00 | 2 |
| | 6 09 31 20 092 90 | plug | 1.00 | 2 |
| | 1 09 30 30 171 90 | screw | 4.00 | 2 |
| | 4 04 31 20 006 00 90 | plug | 2.00 | 2 |
| | 3 04 17 20 127 00 90 | holder | 1.00 | 2 |
| | 9 09 31 20 093 90 | plug | 1.00 | 2 |
| | 2 04 30 31 024 01 90 | fixing set | 2.00 | 2 |
| | 10 09 31 20 094 90 | plug | 1.00 | 2 |
| | 18 09 30 30 112 90 | screw | 3.00 | 2 |
| | 17 04 21 02 146 00 90 | cap | 1.00 | 2 |
| | 5 09 14 10 053 90 | seal | 1.00 | 2 |
| | 8 09 31 20 039 10 90 | plug | 3.00 | 60 |
| | 11 09 14 10 112 90 | seal | 2.00 | 2 |
| | 12 04 30 11 149 00 90 | plug | 2.00 | 2 |
| | 14 90 14 10 056 00 90 | seal | 2.00 | 2 |