

17 861 680



145mm projectionrigid, thermally insulated spout	D
 laminar flow 	
 height of mixer 233 mm 	Ch
 height up to laminar flow regulator 213 mm 	
hole diameter 35 mm	Br
 provides filtered, hot water up to 93°C 	
 provides filtered, cold water 	
• max. flow 2 l/min at 3 bar flow pressure	Pla
 ready-to-use control unit for wall mounting (137mm) 	
x 159mm x 60mm)	Br
 electronic magnetic valve 	(23
• 100-230 V, 50-60 Hz, 18 W power supply unit, incl.	Br
country-specific adapter set	Cł
• lead-free	Go
• Spout ring cannot be removed.	
 This product can help a building meet the requirements of Green Building Rating Systems, 	Cł Go
e.g. LEED®, BREEAM®, DGNB	0
A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.	Br Pla
In addition, the installation must be above a	
kitchen sink.	
The filter cartridge must be changed every six	
months. The installation instructions contain further information for guidance.	
Detailed planning information and technical data	
can be found at	
www.dornbracht.com/professional	
A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter	
In addition, the installation must be above a kitchen sink.	
The filter cartridge must be changed every six	
months. The installation instructions contain further information for guidance.	

Detailed planning information and technical data can be found at www.dornbracht.com/professional

Required miscellaneous




Hot water tank incl. filter -

12 892 970 90


	Dark Chrome	17 861 680-19
	Chrome	17 861 680-00
m	Brushed Platinum	17 861 680-06
	Platinum	17 861 680-08
	Brushed Durabrass (23kt Gold)	17 861 680-28
	Brushed Champagne (22kt Gold)	17 861 680-46
	Champagne (22kt Gold)	17 861 680-47
,	Brushed Dark Platinum	17 861 680-99



17 861 680



Flow rate chart



Codes & Standards

NSF372

NSF61




17 861 680

Certificates

IAPMO_N-4 IAPMO_6



17 861 680

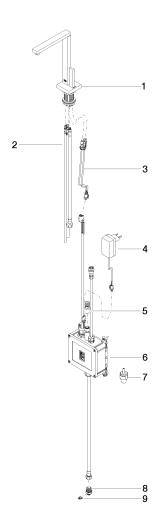



17 861 680

Spare parts list