

## AQUAMOON Concealed ceiling installation box with color light -

---

35 625 970 90



- concealed rough parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 12 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 10 l/min (at 3 bar)
- QUEEN'S COLLAR CASCADE: Rounded cascade, max. flow rate 24 l/min (at 3 bar)
- Ceiling installation enclosure 1356 x 1356 x 290 mm
- Opening diameter 1252 mm
- Ceiling construction with adequate structural strength for the permanent attachment of the device (weight: 57.5 kg / 127 lbs. (US)). M8 threaded bolts (minimum strength: 2000 N) are required to secure the ceiling module

To be provided by the customer. Zigbee Gateway!

### Recommended miscellaneous

---



**Leak protection 3/4" -**

12 012 970 90


- This article is needed 3x.



## AQUAMOON Concealed ceiling installation box with color light -

---

35 625 970 90

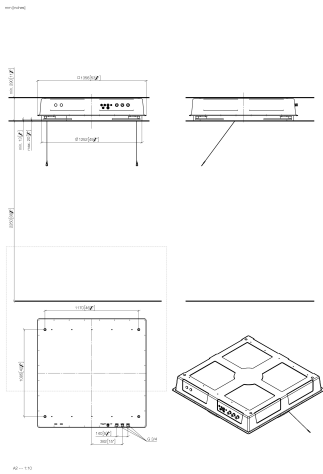

### Codes & Standards

---

DIN 4109

ISO 3822

Ü-Zeichen

### Certificates


---

LGA\_29

AQUAMOON Concealed ceiling installation box with color light -

---

35 625 970 90

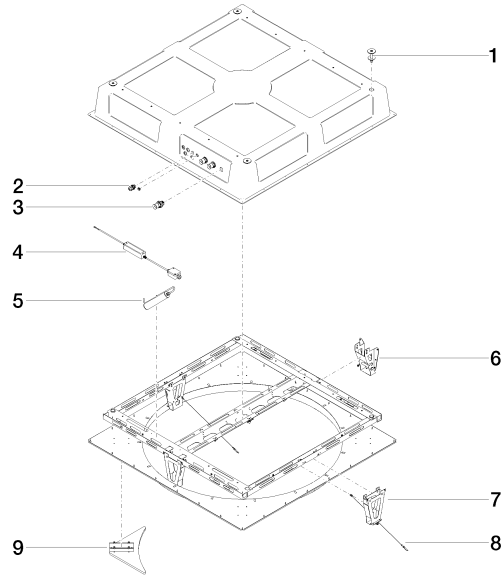



## AQUAMOON Concealed ceiling installation box with color light -

---

35 625 970 90

### Spare parts list

| No. | Item Number        | Name       | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
|     | 04 24 03 239 02 90 | fixing set | 18            | 2             |