








36 425 845 Product version from 6/30/2022



- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Matte Black	36 425 845-33
	Chrome	36 425 845-00
	Brushed Platinum	36 425 845-06
	Dark Chrome	36 425 845-19
	Brushed Light Gold	36 425 845-27
	Brushed Chrome	36 425 845-93
	Brushed Dark Platinum	36 425 845-99

#### Required miscellaneous



- |                               |               |
|-------------------------------|---------------|
| <b>Concealed thermostat -</b> | 35 425 970 90 |
| • min. recess depth 80 mm     |               |
| • max. recess depth 136 mm    |               |

#### Recommended miscellaneous



- |  |               |
|--|---------------|
| <b>xGRID Attachment set for integrating in the dry wall construction -</b> | 12 340 970 90 |
|--|---------------|

#### Required miscellaneous




- |   |               |
|---|---------------|
| <b>Concealed thermostat with built-in isolators -</b> | 35 426 970 90 |
| • min. recess depth 80 mm                             |               |
| • max. recess depth 136 mm                            |               |

#### Required miscellaneous




- |  |               |
|--|---------------|
| <b>xGRID Installation track 555 mm -</b> | 12 360 970 90 |
|--|---------------|

mm [inches]

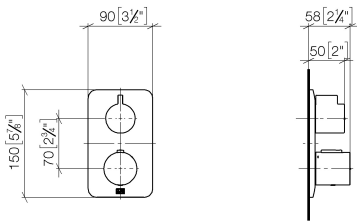

Flow rate chart

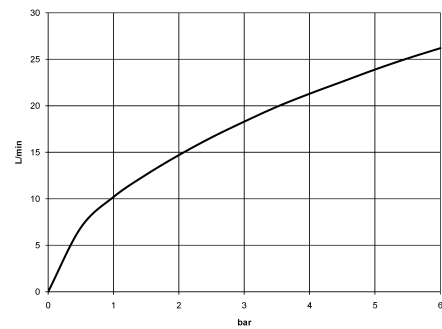

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen	VA-Zeichen	



LISSE Concealed thermostat with one function volume control - Matte Black

LISSE

36 425 845 Product version from 6/30/2022

Certificates and sustainability

LGA_19	ETA_20	DVGW_DW-6512DN0	LGA_19	WRAS_250402
--------	--------	-----------------	--------	-------------

