



WATER FALL Cascade spout with individual jets for wall mounting - Brushed Durabrass (23kt Gold)

13 425 979 Product version from 10/1/2023



- 22mm projection
- PEARLSTREAM
- plate 240 mm x 60 mm
- connection 1/2", for shortening
- plug-link mounting
- Max. flow rate 9.5 l/min (at 3 bar)

	Brushed Durabrass (23kt Gold)	13 425 979-28
	Chrome	13 425 979-00
	Brushed Platinum	13 425 979-06
	Platinum	13 425 979-08
	Dark Chrome	13 425 979-19
	Light Gold	13 425 979-26
	Brushed Light Gold	13 425 979-27
	Matte Black	13 425 979-33
	Brushed Bronze	13 425 979-42
	Brushed Champagne (22kt Gold)	13 425 979-46
	Champagne (22kt Gold)	13 425 979-47
	Brushed Chrome	13 425 979-93
	Brushed Dark Platinum	13 425 979-99

Recommended miscellaneous


	Concealed wall elbow - <ul style="list-style-type: none">• max. recess depth mm• min. recess depth mm	35 085 970 90
--	---	---------------

Recommended miscellaneous


	Concealed wall elbow - <ul style="list-style-type: none">• max. recess depth mm• min. recess depth mm	35 085 970 90
--	---	---------------

WATER FALL Cascade spout with individual jets for wall mounting - Brushed Durabron (23kt Gold)


13 425 979 Product version from 10/1/2023
mm [inches]

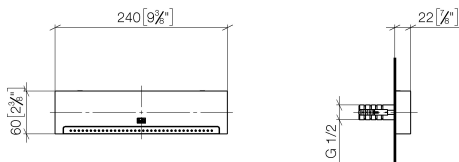

Flow rate chart

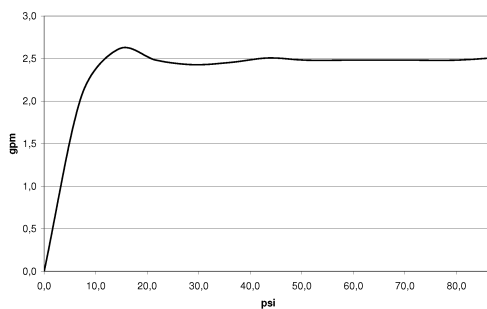

Trajectory diagram

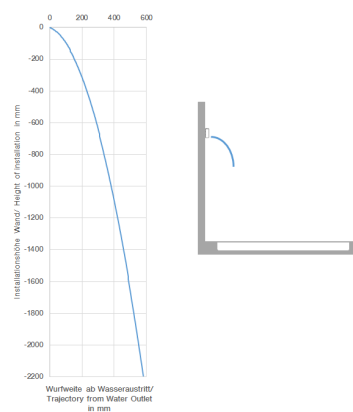

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Brushed Durabrass (23kt Gold)


13 425 979 Product version from 10/1/2023

Certificates

LGA_19

WATER FALL Cascade spout with individual jets for wall mounting - Brushed Durabronz (23kt Gold)

13 425 979 Product version from 10/1/2023

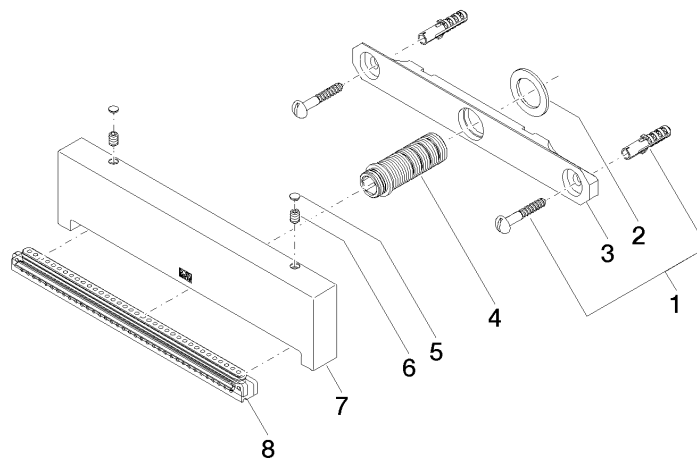

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	1	2
2	09 14 05 009 90	seal	1	2
3	09 17 97 053 90	holder	1	2
4	90 24 03 199 00 90	connection	1	2
5	90 31 20 087 00-28	plug	1	20
6	09 31 11 144 90	pin	2	2
7	09 17 01 185 20-28	spout	1	20
8	90 29 03 071 00 90	insert	1	2