

SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980 Product version from 4/30/2009



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette 60 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- WRAS

For Touchfree control please order eSet Touchfree
with temperature adjustment

Recommended miscellaneous



Concealed wall elbow -


- max. recess depth mm
- min. recess depth mm

35 085 970 90

SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980 Product version from 4/30/2009

mm [inches]

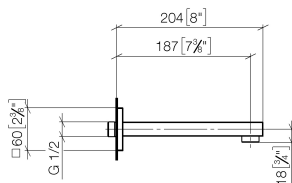

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980 Product version from 4/30/2009


Certificates

LGA_18

WRAS_1904

SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980 Product version from 4/30/2009

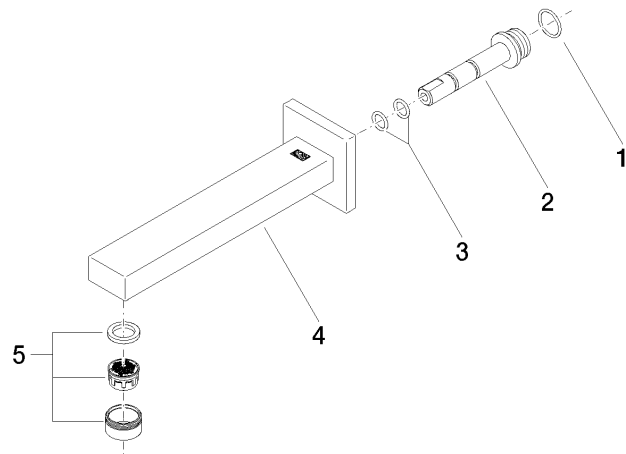

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 14 10 053 90	seal	1	2
2	09 24 04 135 90	nipple	1	2
3	09 14 10 008 90	seal	2	2
4	90 11 68 004 00-00	spout	1	10
5	90 23 01 029 02-00	aerator	1	10