

MADISON Rain shower with ceiling fixing 200 mm - Platinum

MADISON







28 565 977 Product version up to 12/5/2019



- rain shower Ø 200 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 8 l/min
- with anti-scale system

Technical data:

- distance between ceiling and lower edge of the shower 185mm
- rosette Ø 55 mm
- 1/2" connection

	Platinum	28 565 977-08
	Chrome	28 565 977-00
	Brushed Platinum	28 565 977-06
	Durabrand (23kt Gold)	28 565 977-09
	Brushed Durabrand (23kt Gold)	28 565 977-28
	Brushed Dark Platinum	28 565 977-99

Recommended miscellaneous




Concealed wall elbow -


35 085 970 90

- max. recess depth 163 mm
- min. recess depth 90 mm

mm [inches]

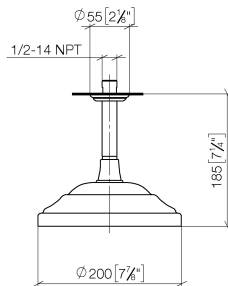

Flow rate chart

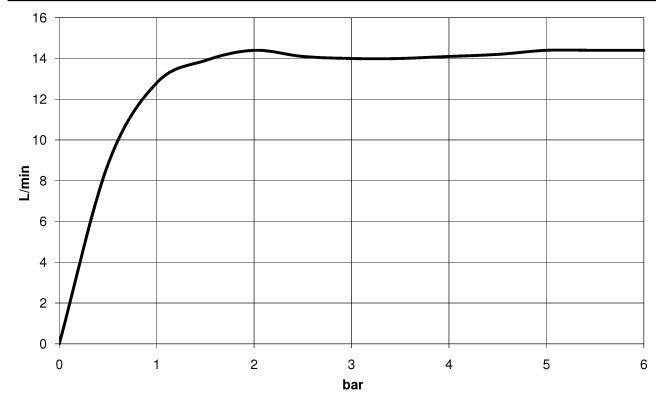

Codes & Standards

DIN 4109	EN 1112	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



MADISON Rain shower with ceiling fixing 200 mm - Platinum

MADISON


28 565 977 Product version up to 12/5/2019

Certificates and sustainability

DVGW_DW-
6517DN0

LGA_38

WRAS_250102

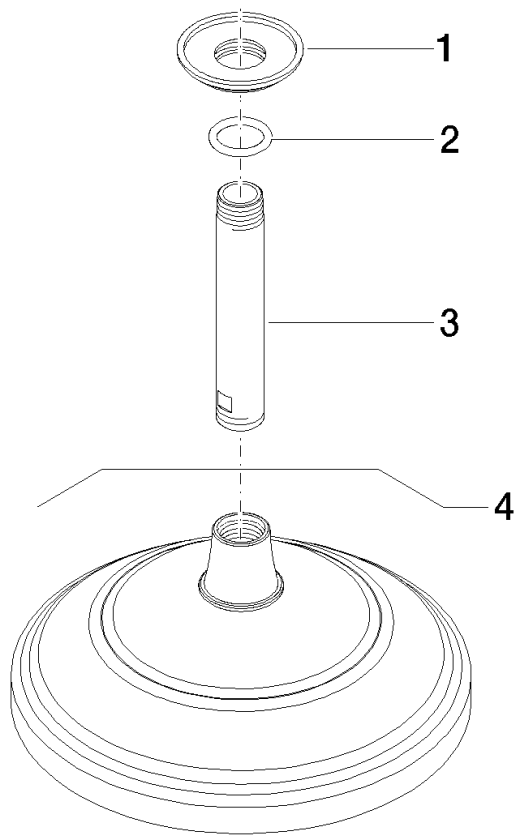

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	09 11 03 018-08	connection	1.00	40
1	09 27 35 003-08	rosette	1.00	40
2	90 14 10 026 00 90	seal	2.00	2