

Concealed wall mounting -

35 003 970 90



- red brass, lead-free
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- soundproofing
- WRAS 2101023, 2003025

Can only be combined with exposed trim parts 26
024 661-FF / 36 013 660-FF / 36 045 660-FF / 36
013 970-FF / 36 045 970-FF / 36 804 661-FF.

Recommended miscellaneous



Extension 25 mm - 12 179 970 90
•Can only be combined with
exposed trim parts 36 804 661-FF.

Required miscellaneous




Drybox Concealed thermostat - XS-08 3952
•Overflow is part of the scope of
delivery.


Concealed wall mounting -

35 003 970 90

mm [inches]

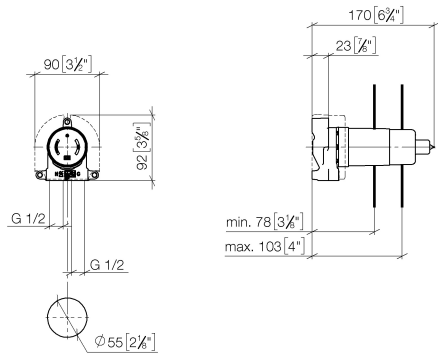

Flow rate chart

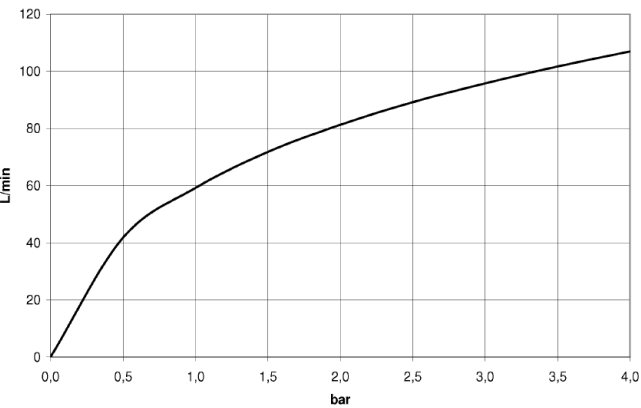

Codes & Standards

DIN 4109	EN 817	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



Concealed wall mounting -

35 003 970 90

Certificates


WRAS_2101	DVGW_DW- 6512DN0	WRAS_2003	LGA_18
-----------	---------------------	-----------	--------

Concealed wall mounting -

35 003 970 90

Product version up to 10/2/2019

Product version from 10/2/2019

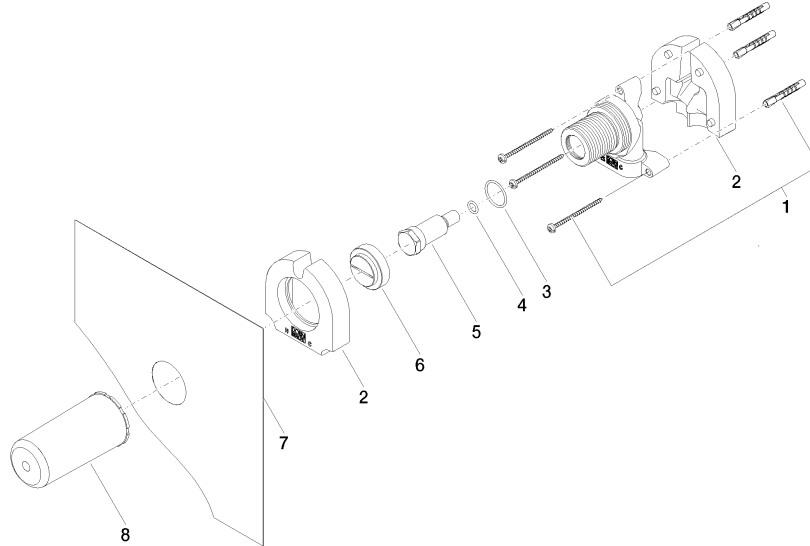



Concealed wall mounting -

35 003 970 90

Spare parts list

Product version up to 10/2/2019

Product version from 10/2/2019

No.	Item Number	Name	Quantity used	Delivery time
	05 30 31 029 00 90	fixing set	9	2