



Concealed single-lever mixer -

35 020 970 90



- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- 2x integrated supply stop
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 60 mm
- WRAS 2207012

Recommended miscellaneous

Extension 25 mm -

12 191 970 90



Recommended miscellaneous

Extension 25 mm -

12 190 970 90



Required miscellaneous

Leak protection 1/2" -

- This article is needed 2x.

12 010 970 90



Required miscellaneous




Drybox Concealed single-lever mixer with and without diverter -
● Overflow is part of the scope of delivery.

39 121 970 90


Concealed single-lever mixer -

35 020 970 90

mm [inches]

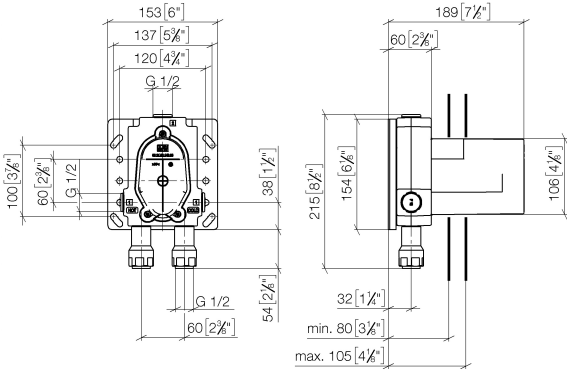

Flow rate chart

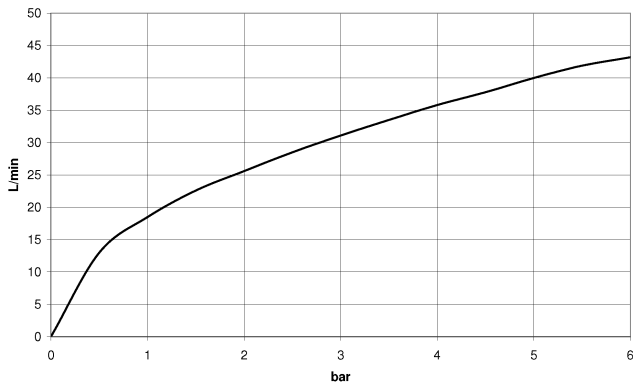

Codes & Standards

DIN 4109

EN 817

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Concealed single-lever mixer -

35 020 970 90

Certificates


DVGW_DW-
6512DN0

WRAS_2207

LGA_19

Concealed single-lever mixer -

35 020 970 90

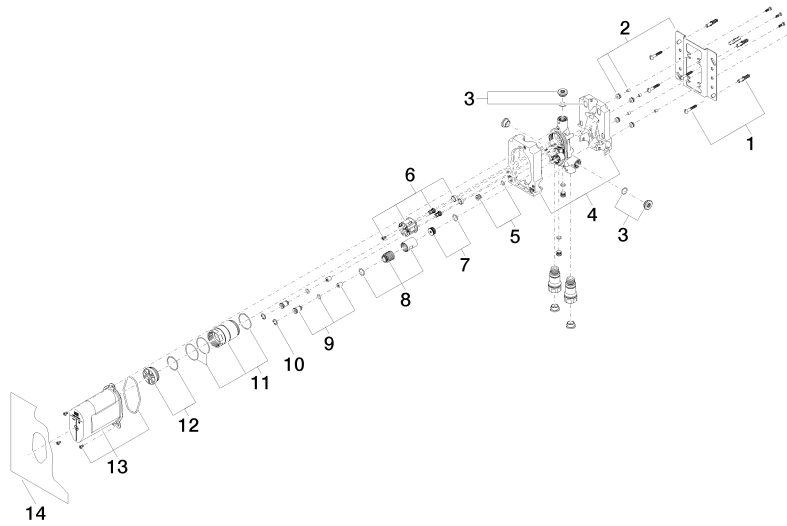



Concealed single-lever mixer -

35 020 970 90

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| | 04 30 31 024 01 90 | fixing set | 18 | 2 |