







28 528 360



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 7 l/min (at 3 bar)
- rosette Ø 55 mm
- 1/2" connection

	Durabronss (23kt Gold)	28 528 360-09
	Chrome	28 528 360-00
	Brushed Platinum	28 528 360-06
	Platinum	28 528 360-08
	Brushed Durabronss (23kt Gold)	28 528 360-28
	Brushed Dark Platinum	28 528 360-99


**Recommended miscellaneous**



- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
  - min. recess depth 90 mm

28 528 360

mm [inches]



**Flow rate chart**



**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



MADISON Body spray without volume control - Durabrass (23kt Gold)


MADISON

28 528 360

Certificates

LGA\_38

WRAS\_240602

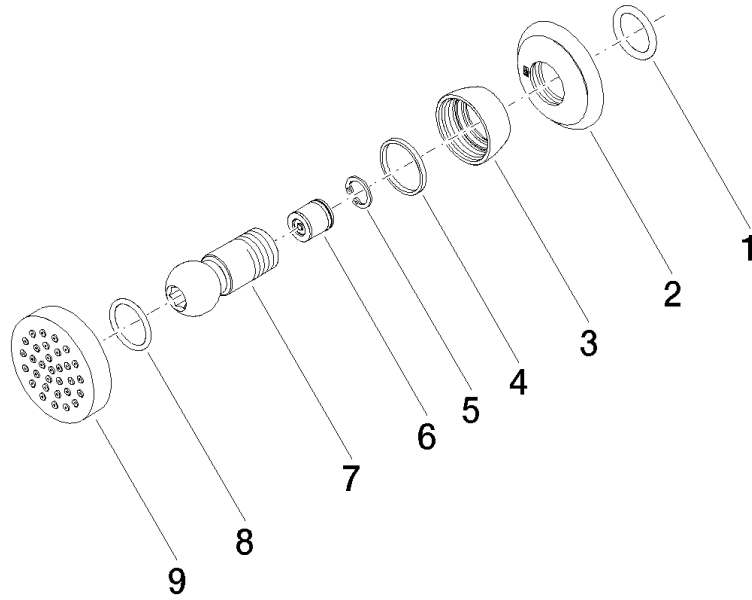



MADISON Body spray without volume control - Durabrass (23kt Gold)

MADISON

28 528 360

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
	90 14 10 026 00 90	seal	9	2