
















xTOOL Concealed thermostat without volume control 1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 501 979 Product version from 1/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Champagne (22kt Gold)	36 501 979-46
	Chrome	36 501 979-00
	Brushed Platinum	36 501 979-06
	Platinum	36 501 979-08
	Durabrand (23kt Gold)	36 501 979-09
	Dark Chrome	36 501 979-19
	Light Gold	36 501 979-26
	Brushed Light Gold	36 501 979-27
	Brushed Durabrand (23kt Gold)	36 501 979-28
	Matte Black	36 501 979-33
	Brushed Dark Brass	36 501 979-39
	Brushed Bronze	36 501 979-42
	Champagne (22kt Gold)	36 501 979-47
	Brushed Chrome	36 501 979-93
	Brushed Dark Platinum	36 501 979-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control -


35 503 970 90

- max. recess depth 110 mm
- min. recess depth 85 mm

xTOOL Concealed thermostat without volume control 1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 501 979 Product version from 1/1/2022
mm [inches]

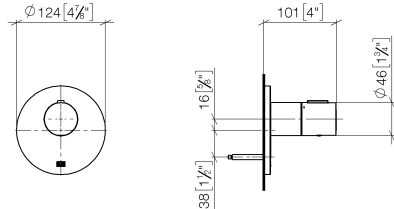

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 1/2" - Brushed
Champagne (22kt Gold)

SERIES SPECIFIC

36 501 979 Product version from 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 1/2" - Brushed
Champagne (22kt Gold)**

SERIES SPECIFIC

36 501 979 Product version from 1/1/2022

