

AQUAMOON Rain panel - Matte White

41 620 979



- exposed trim parts
 - Rain panel with 3 different flow modes
 - AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 12 l/min (at 3 bar)
 - TEMPEST RAIN: Natural rain, max. flow rate 10 l/min (at 3 bar)
 - QUEEN'S COLLAR CASCADE: Rounded cascade, max. flow rate 24 l/min (at 3 bar)
 - Indirect mood lighting, warm white LED light strip 2700K
 - Matt white cover, RAL 9003
 - with anti-scale system
 - Outer diameter 1240 mm, opening diameter 450 mm
 - Weight 22.5 kg
 - Protection rating IP67
 - Control elements not included among the items supplied
- Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request**

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

Required miscellaneous




AQUAMOON Concealed ceiling installation box - 35 620 970 90


- Ceiling installation enclosure 1356 x 1356 x 290 mm
- concealed rough parts
- Opening diameter 1252 mm
- min. recess depth 290 mm

AQUAMOON Rain panel - Matte White

41 620 979

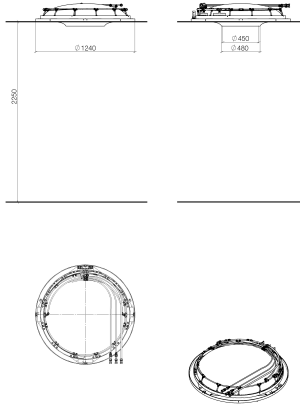

Flow rate chart

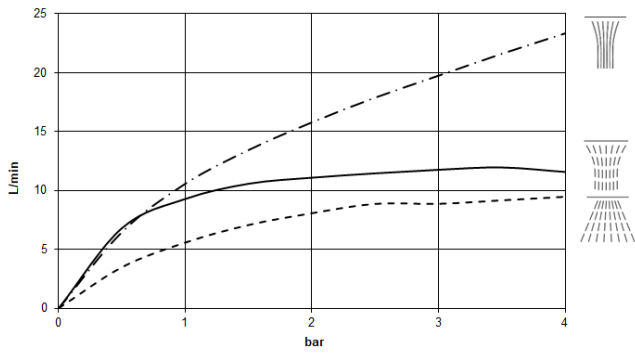

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



AQUAMOON Rain panel - Matte White


41 620 979

Certificates

LGA_29

AQUAMOON Rain panel - Matte White

41 620 979

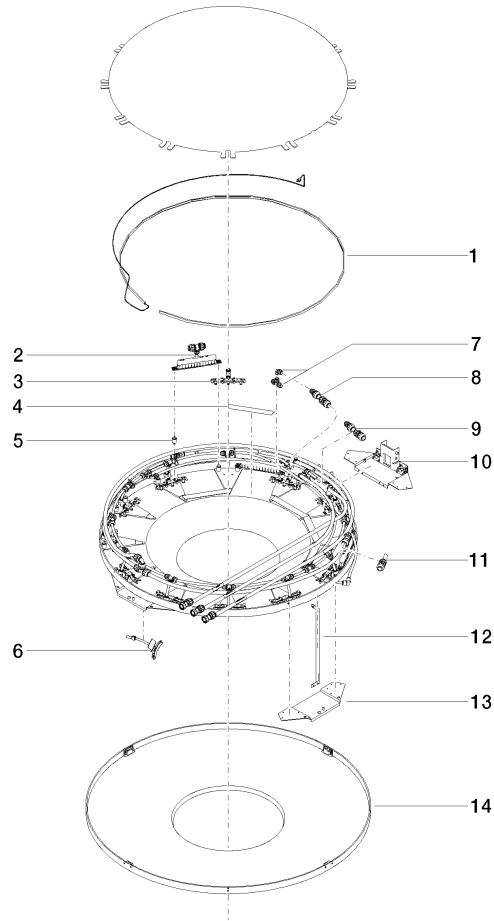



AQUAMOON Rain panel - Matte White

41 620 979

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 10 01 183 00 90	lamp	72	2