

WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

13 425 979



- 22mm projection
- PEARLSTREAM
- plate 240 mm x 60 mm
- connection 1/2", for shortening
- plug-link mounting
- Max. flow rate 9.5 l/min (at 3 bar)

| | | |
|--|--------------------------------|---------------|
| | Dark Chrome | 13 425 979-19 |
| | Chrome | 13 425 979-00 |
| | Brushed Platinum | 13 425 979-06 |
| | Platinum | 13 425 979-08 |
| | Light Gold | 13 425 979-26 |
| | Brushed Light Gold | 13 425 979-27 |
| | Brushed Durabronze (23kt Gold) | 13 425 979-28 |
| | Matte Black | 13 425 979-33 |
| | Brushed Bronze | 13 425 979-42 |
| | Brushed Champagne (22kt Gold) | 13 425 979-46 |
| | Champagne (22kt Gold) | 13 425 979-47 |
| | Brushed Chrome | 13 425 979-93 |
| | Brushed Dark Platinum | 13 425 979-99 |

Recommended miscellaneous



- Concealed wall elbow -**
- max. recess depth mm
 - min. recess depth mm

35 085 970 90

Recommended miscellaneous



- Concealed wall elbow -**
- max. recess depth mm
 - min. recess depth mm

35 085 970 90




WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome


13 425 979
mm [inches]



Flow rate chart

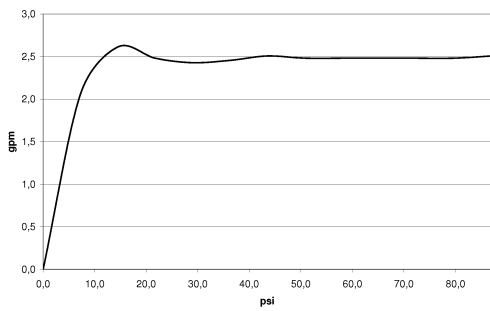

Trajectory diagram

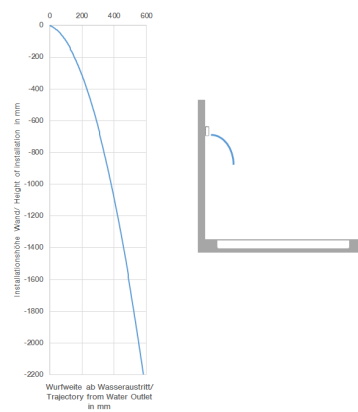

Codes & Standards

ASME A112.18.1 cUPC DIN 4109 ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

13 425 979

Certificates

LGA_19

IAPMO_4976

WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

13 425 979

