

















WATER FALL Cascade spout with individual jets for wall mounting - Matte Black


SERIES-VARIOUS

13 425 979	Product version from 10/1/2023		
	<ul style="list-style-type: none"> • 22mm projection • PEARLSTREAM • plate 240 mm x 60 mm • connection 1/2", for shortening • plug-link mounting • Max. flow rate 9.5 l/min (at 3 bar) 		
		<div>  Matte Black </div>	13 425 979-33
		<div>  Chrome </div>	13 425 979-00
		<div>  Brushed Platinum </div>	13 425 979-06
		<div>  Platinum </div>	13 425 979-08
		<div>  Dark Chrome </div>	13 425 979-19
		<div>  Light Gold </div>	13 425 979-26
		<div>  Brushed Light Gold </div>	13 425 979-27
		<div>  Brushed Durabrass (23kt Gold) </div>	13 425 979-28
		<div>  Brushed Dark Brass </div>	13 425 979-39
		<div>  Brushed Bronze </div>	13 425 979-42
		<div>  Brushed Champagne (22kt Gold) </div>	13 425 979-46
		<div>  Champagne (22kt Gold) </div>	13 425 979-47
		<div>  Brushed Chrome </div>	13 425 979-93
		<div>  Brushed Dark Platinum </div>	13 425 979-99

Recommended miscellaneous

	<div> Concealed wall elbow - <ul style="list-style-type: none"> • max. recess depth 163 mm • min. recess depth 90 mm </div>	35 085 970 90
		

Recommended miscellaneous

	<div> Concealed wall elbow - <ul style="list-style-type: none"> • max. recess depth 163 mm • min. recess depth 90 mm </div>	35 085 970 90
		


WATER FALL Cascade spout with individual jets for wall mounting - Matte Black

SERIES-VARIOUS


13 425 979 Product version from 10/1/2023
mm [inches]



Flow rate chart

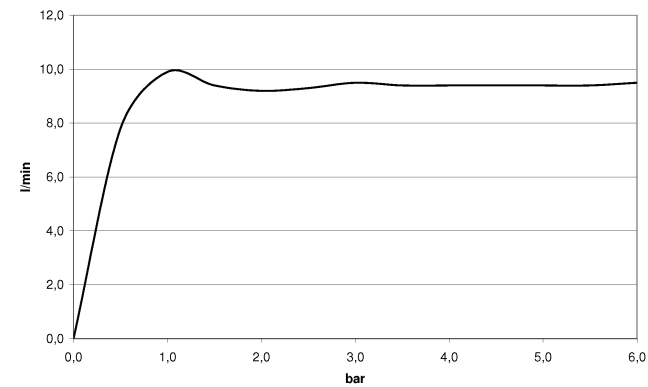

Trajectory diagram

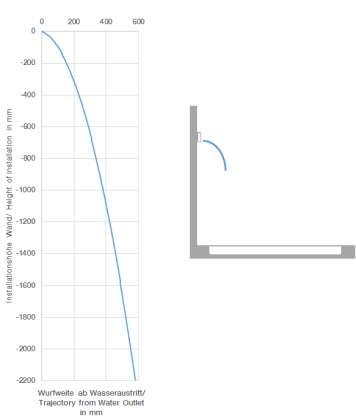

Codes & Standards

ASME A112.18.1 cUPC DIN 4109 ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Matte Black

SERIES-VARIOUS

13 425 979 Product version from 10/1/2023

Certificates and sustainability

LGA_19

IAPMO_4976



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 24 03 199 00 90	connection	1.00	2
5	90 31 20 087 00-33	plug	1.00	30
6	09 31 11 144 90	pin	2.00	2
1	04 30 31 024 01 90	fixing set	1.00	2
2	09 14 05 009 90	seal	1.00	2
7	09 17 01 185 20-33	spout	1.00	30
3	09 17 97 053 90	holder	1.00	2
8	90 29 03 071 00 90	insert	1.00	2