
















## Body spray without volume control - Platinum

## SERIES SPECIFIC

28 528 979 Product version from 10/1/2023



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 7 l/min (at 3 bar)
- with anti-scale system
- rosette Ø 55 mm
- 1/2" connection
- WRAS

	Platinum	28 528 979-08
	Chrome	28 528 979-00
	Brushed Platinum	28 528 979-06
	Durabrand (23kt Gold)	28 528 979-09
	Dark Chrome	28 528 979-19
	Light Gold	28 528 979-26
	Brushed Light Gold	28 528 979-27
	Brushed Durabrand (23kt Gold)	28 528 979-28
	Matte Black	28 528 979-33
	Brushed Dark Brass	28 528 979-39
	Brushed Bronze	28 528 979-42
	Brushed Champagne (22kt Gold)	28 528 979-46
	Champagne (22kt Gold)	28 528 979-47
	Brushed Chrome	28 528 979-93
	Brushed Dark Platinum	28 528 979-99

## Recommended miscellaneous




### Concealed wall elbow -


35 085 970 90

- max. recess depth 163 mm
- min. recess depth 90 mm

mm [inches]



### Flow rate chart

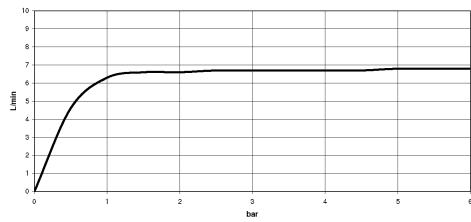

### Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------

### Ü-Zeichen



## Body spray without volume control - Platinum


SERIES SPECIFIC

28 528 979 Product version from 10/1/2023

Certificates and sustainability

LGA\_38

WRAS\_240602

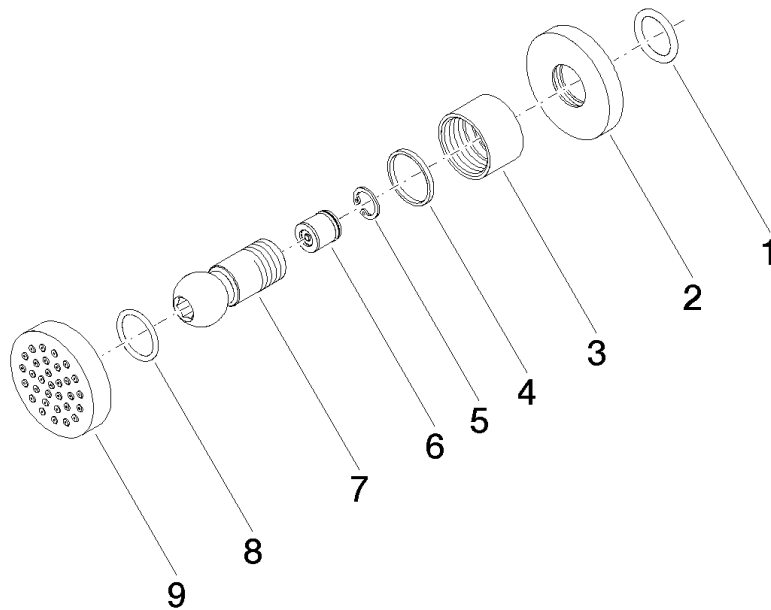

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
9	90 12 05 027 00-08	casing ( completely )	1.00	40
5	09 16 01 014 90	ring	1.00	2
3	09 23 30 026-08	nut	1.00	40
6	90 23 01 147 00 90	back-flow preventer	1.00	2
4	09 14 15 010 90	ring	1.00	2
7	09 21 40 016-08	connection	1.00	40
1	90 14 10 026 00 90	seal	1.00	2
8	09 14 10 015 90	seal	1.00	2
2	09 27 22 019-08	rosette	1.00	40