














xTOOL Concealed thermostat without volume control 3/4" - Brushed Champagne (22kt Gold)


SERIES SPECIFIC

36 503 780 Product version from 1/1/2022 to 9/1/2022			
	<ul style="list-style-type: none"> cover plate 120 x 120 mm temperature control handle with safety limit stop at 38°C thermostat cartridge WRAS 		
		Brushed Champagne (22kt Gold)	36 503 780-46
		Chrome	36 503 780-00
		Brushed Platinum	36 503 780-06
		Platinum	36 503 780-08
		Dark Chrome	36 503 780-19
		Brushed Light Gold	36 503 780-27
		Brushed Durabrass (23kt Gold)	36 503 780-28
		Matte Black	36 503 780-33
		Champagne (22kt Gold)	36 503 780-47
		Brushed Chrome	36 503 780-93
		Brushed Dark Platinum	36 503 780-99


Required miscellaneous

	xTOOL Concealed thermostat module without volume control -	35 503 970 90
	<ul style="list-style-type: none"> max. recess depth 155 mm min. recess depth 115 mm 	

Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
---	--	---------------


Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
---	--	---------------

xTOOL Concealed thermostat without volume control 3/4" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 503 780 Product version from 1/1/2022 to 9/1/2022
mm [inches]

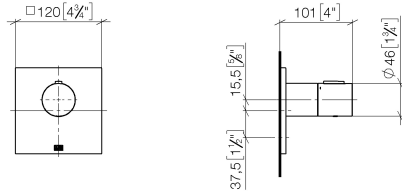

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 3/4" - Brushed
Champagne (22kt Gold)

SERIES SPECIFIC

36 503 780 Product version from 1/1/2022 to 9/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 3/4" - Brushed
Champagne (22kt Gold)**

SERIES SPECIFIC

36 503 780 Product version from 1/1/2022 to 9/1/2022

