













MEM Wall-mounted basin mixer without pop-up waste - Brushed Durabrass (23kt Gold)
MEM

36 717 782 Product version from 3/10/2014 to 10/27/2020			
	<ul style="list-style-type: none"> • 240mm projection • fixed spout • rectangular, air-enriched flow • hole diameter valve 40 mm • hole diameter spout 40 mm • individual rosette 60 x 60 mm • max. flow 5.7 l/min • lead-free • This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB • WRAS 		<div>  Brushed Durabrass (23kt Gold) 36 717 782-28 </div>
			<div>  Chrome 36 717 782-00 </div>
			<div>  Brushed Platinum 36 717 782-06 </div>
			<div>  Platinum 36 717 782-08 </div>
			<div>  Dark Chrome 36 717 782-19 </div>
			<div>  Brushed Dark Brass 36 717 782-39 </div>
			<div>  Brushed Champagne (22kt Gold) 36 717 782-46 </div>
			<div>  Champagne (22kt Gold) 36 717 782-47 </div>
			<div>  Brushed Dark Platinum 36 717 782-99 </div>

Required miscellaneous

	Concealed wall-mounted mixer 35 700 970 90
	centred spout - • max. recess depth 150 mm • min. recess depth 110 mm


Required miscellaneous

	Concealed wall-mounted mixer 35 720 970 90
	variable positioning - • min. recess depth 110 mm • max. recess depth 150 mm


MEM Wall-mounted basin mixer without pop-up waste - Brushed Durabronz (23kt Gold)

MEM

36 717 782 Product version from 3/10/2014 to 10/27/2020
mm [inches]

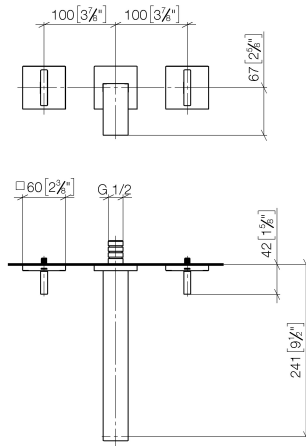

Flow rate chart

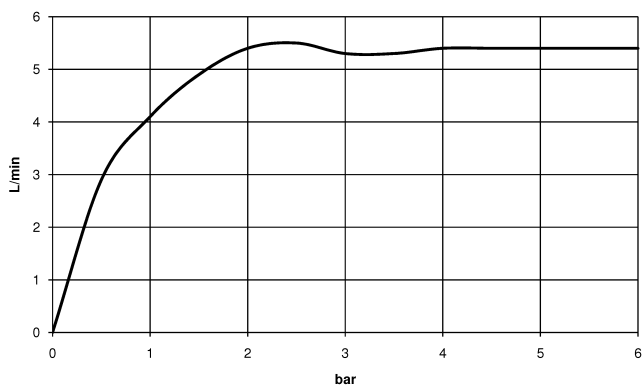

Codes & Standards

DIN 4109

EN 200

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen

VA-Zeichen



MEM Wall-mounted basin mixer without pop-up waste - Brushed Durabrass
(23kt Gold)

MEM

36 717 782 Product version from 3/10/2014 to 10/27/2020

Certificates and sustainability

LGA_18	WRAS_2204	ETA_19
--------	-----------	--------

