

SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette 60 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- WRAS 1904065

For Touchfree control please order eSet Touchfree
WITH or WITHOUT temperature adjustment

Recommended miscellaneous



Concealed wall elbow -

35 085 970 90


- max. recess depth 163 mm
- min. recess depth 90 mm



SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980

mm [inches]

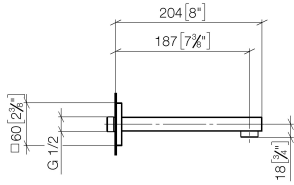

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980

Certificates

WRAS_1904


LGA_18



SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980

Product version from 4/30/2009

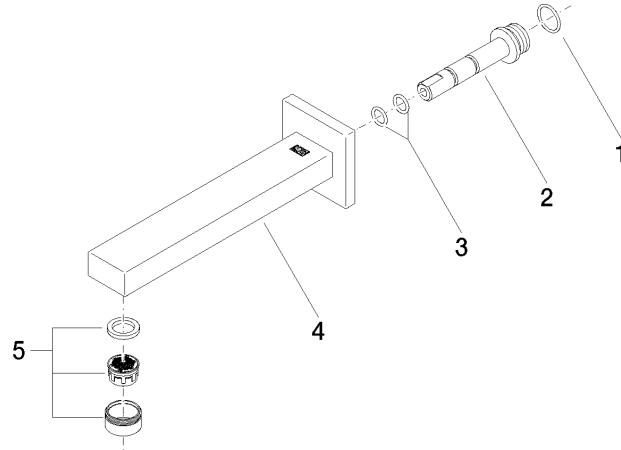



SYMETRICS Wall-mounted basin spout without pop-up waste - Chrome

13 800 980

Spare parts list

Product version from 4/30/2009

No.	Item Number	Name	Quantity used	Delivery time
	09 14 10 053 90	seal	6	2