

## Body spray without volume control FlowReduce - Brushed Light Gold

SERIES SPECIFIC

28 518 782



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- rain flow
- anti-scale system
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 5 l/min
- WRAS
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

|   |                               |               |
|---|-------------------------------|---------------|
|    | Brushed Light Gold            | 28 518 782-27 |
|    | Chrome                        | 28 518 782-00 |
|    | Brushed Platinum              | 28 518 782-06 |
|    | Platinum                      | 28 518 782-08 |
|    | Dark Chrome                   | 28 518 782-19 |
|    | Brushed Durabrass (23kt Gold) | 28 518 782-28 |
|    | Matte Black                   | 28 518 782-33 |
|    | Brushed Champagne (22kt Gold) | 28 518 782-46 |
|    | Champagne (22kt Gold)         | 28 518 782-47 |
|   | Brushed Chrome                | 28 518 782-93 |
|  | Brushed Dark Platinum         | 28 518 782-99 |

### Recommended miscellaneous

#### Concealed wall elbow -


35 085 970 90




- min. recess depth 90 mm
- max. recess depth 163 mm

28 518 782


mm [inches]



Flow rate chart

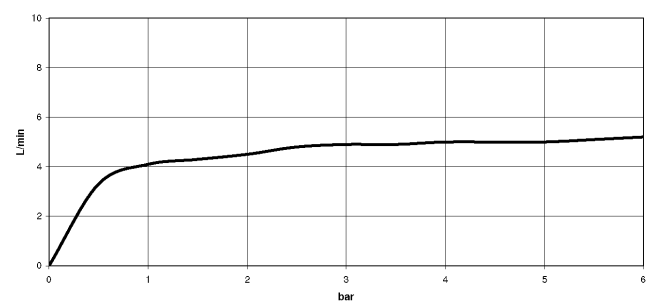

Trajectory diagram

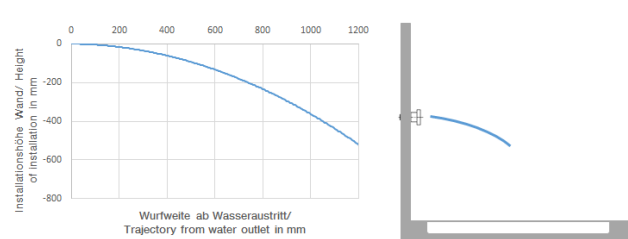

Codes & Standards

|          |          |                        |                             |
|----------|----------|------------------------|-----------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|------------------------|-----------------------------|

Ü-Zeichen



Body spray without volume control FlowReduce - Brushed Light Gold

SERIES SPECIFIC

28 518 782

Certificates and sustainability

LGA\_38

WRAS\_240602

28 518 782

