

xTOOL Concealed thermostat without volume control 3/4" - Dark Chrome

SERIES SPECIFIC

36 503 780



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

|   |                               |               |
|---|-------------------------------|---------------|
|    | Dark Chrome                   | 36 503 780-19 |
|    | Chrome                        | 36 503 780-00 |
|    | Brushed Platinum              | 36 503 780-06 |
|    | Platinum                      | 36 503 780-08 |
|    | Brushed Light Gold            | 36 503 780-27 |
|    | Brushed Durabrass (23kt Gold) | 36 503 780-28 |
|    | Matte Black                   | 36 503 780-33 |
|    | Brushed Champagne (22kt Gold) | 36 503 780-46 |
|    | Champagne (22kt Gold)         | 36 503 780-47 |
|   | Brushed Chrome                | 36 503 780-93 |
|  | Brushed Dark Platinum         | 36 503 780-99 |

Required miscellaneous



- xTOOL Concealed thermostat module without volume control -

35 503 970 90

  - max. recess depth 155 mm
  - min. recess depth 115 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous




- xGRID Installation track 555 mm -

12 360 970 90

36 503 780

mm [inches]

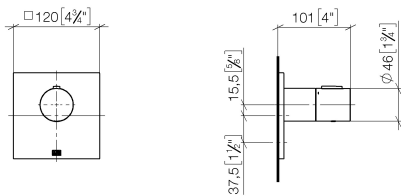

### Flow rate chart



### Codes & Standards

|                             |           |          |                        |
|-----------------------------|-----------|----------|------------------------|
| DIN 4109                    | EN 1111   | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen |          |                        |



xTOOL Concealed thermostat without volume control 3/4" - Dark Chrome

SERIES SPECIFIC

36 503 780

Certificates and sustainability

|           |                     |        |
|-----------|---------------------|--------|
| WRAS_2011 | DVGW_DW-<br>6512DN0 | LGA_29 |
|-----------|---------------------|--------|

36 503 780

