



ST 010 104 9782



- 200mm projection
- fixed spout
- rectangular, air-enriched flow
- height of mixer 321 mm
- height up to aerator 190 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power
- Tob-240 V AC / 12 V Dc, 30-00 Hz, 16 W power supply unit, incl. country-specific adapter set
   This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Individual components of this set

You need the following components for this set



42 765 970 90



1x

13 716 782-00



MEM

ST 010 104 9782





ST 010 104 9782



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
   Cannot be combined with basins in conducting materials (e.g. steel. river stone).
   Cannot be combined with basins that have a closing drain.

closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

35 741 970 90

#### Required miscellaneous



eSET Touchfree Basin mixer with temperature setting for combining with wall-mounted fittings -

•max. recess depth 125 mm

•min. recess depth 90 mm

#### Recommended miscellaneous

**Extension for Touchfree 500 mm -** 12 765 970 90


#### Required miscellaneous




eSET Touchfree Basin mixer with 35 740 970 90 temperature setting for combining with free-standing fittings -



ST 010 104 0782 mm [inches]





#### Certificates

LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou


chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.





ST 010 104 9782

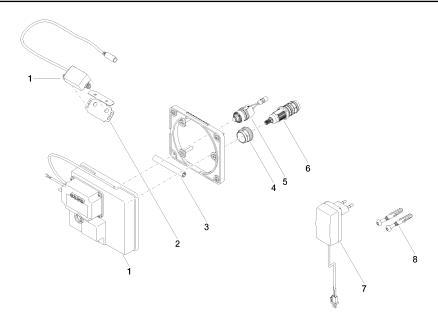

### Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
90 23 01 124 00 90	sleeve	1	2
09 23 10 129 90	nut	1	2
04 30 50 079 00 90	valve	1	2
90 15 02 013 00 90	cartridge	1	2
04 10 01 246 00 90	electronic accessories	1	2
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 90 23 01 124 00 90 09 23 10 129 90 04 30 50 079 00 90 90 15 02 013 00 90 04 10 01 246 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 90 23 01 124 00 90 sleeve 09 23 10 129 90 nut 04 30 50 079 00 90 valve 90 15 02 013 00 90 cartridge 04 10 01 246 00 90 electronic accessories	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 90 23 01 124 00 90 sleeve 1 09 23 10 129 90 nut 1 04 30 50 079 00 90 valve 1 90 15 02 013 00 90 cartridge 1 04 10 01 246 00 90 electronic accessories 1



MEM

ST 010 104 9782



- 200mm projection
- fixed spout
- rectangular, air-enriched flow
- height of mixer 321 mm
- height up to aerator 190 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Chrome	13 716 782-00
Brushed Platinum	13 716 782-06
Platinum	13 716 782-08
Dark Chrome	13 716 782-19
Brushed Durabrass (23kt Gold)	13 716 782-28
Brushed Champagne (22kt Gold)	13 716 782-46
Champagne (22kt Gold)	13 716 782-47
Brushed Dark Platinum	13 716 782-99




MEM


ST 010 104 9782







### Flow rate chart




#### Certificates

LGA\_28441. GDV\_0400289.



ST 010 104 9782

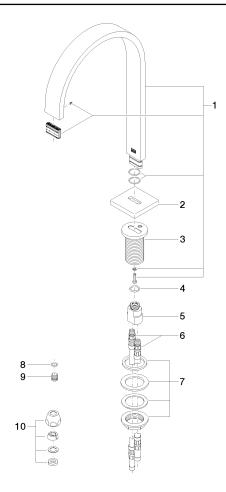

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 28 22 155 01-00	spout	1	10
2	09 27 78 034-00	rosette	1	10
3	09 11 10 054 10 90	connection	1	2
4	09 14 10 130 90	seal	1	2
5	09 11 10 055 10 90	connection	1	2
6	04 30 04 016 00 90	hose	2	60
7	04 23 10 009 01 90	fixing set	1	2
8	90 14 10 060 00 90	seal	1	2
9	09 31 20 065 90	plug	1	2
10	90 23 30 040 00-00	threaded connector	2	10
			<del></del>	