

#### ST 010 107 5980



- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- $\bullet$  2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/minlead-free
- leau-liee
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone).
  Cannot be combined with basins that have a closing drain.
  ATTENTION: Separate terms and conditions for

electronic articles are applicable.

#### Individual components of this set

1x

You need the following components for this set




42 766 970 90

13 721 980-00

1x





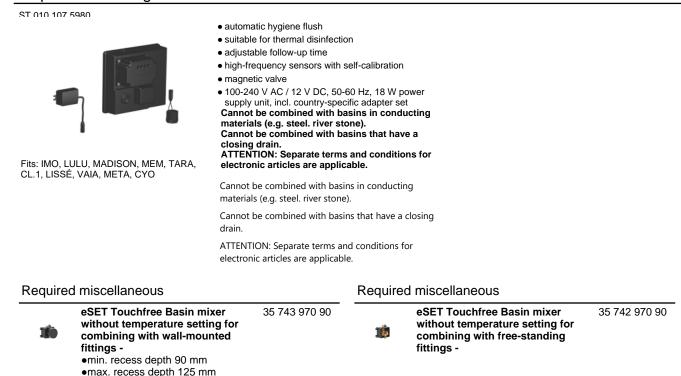



Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 107 5080 mm [inches]






Certificates				
LGA_29120.	WRAS_1906116.	IAPMO_EGS.	CE000001_eSet_Tou chfree_20171206_D E_signed.	CE000002_eSet_Tou chfree_20171206_E N_signed.

LGA\_29119.



ST 010 107 5980

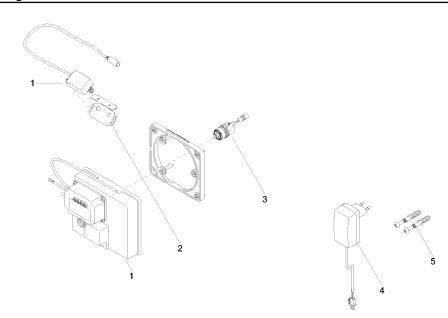

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	04 30 50 079 00 90	valve	1	2
4	04 10 01 050 00 90	power supply	1	60
5	04 30 31 024 01 90	fixing set	1	2







- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free







### Flow rate chart



### Certificates

ETA\_18519. LGA\_18651.



