

ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette for spout 60 x 60mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

  ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Individual components of this set

You need the following components for this set



1x

42 766 970 90

1x

x 13 800 980-00





ST 010 205 4980



ST 010 205 4980



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set

  Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.
  ATTENTION: Separate terms and conditions for

electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing

ATTENTION: Separate terms and conditions for electronic articles are applicable.

35 743 970 90

#### Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted fittings -

•min. recess depth 90 mm •max. recess depth 125 mm

## Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90

#### Required miscellaneous





eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings -

35 742 970 90



ST 010 205 4080 mm [inches]





### Certificates


LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou

chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.



ST 010 205 4980

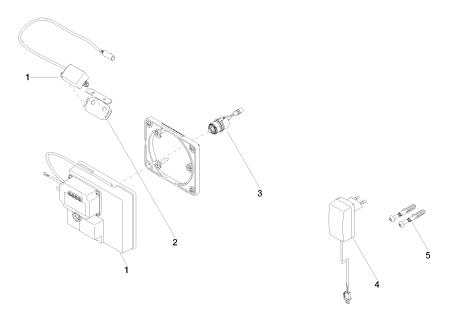

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	04 30 50 079 00 90	valve	1	2
4	04 10 01 050 00 90	power supply	1	60
5	04 30 31 024 01 90	fixing set	1	2



ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette 60 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- WRAS 1904065

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

### Recommended miscellaneous

Concealed wall elbow -

35 085 970 90




•max. recess depth 163 mm •min. recess depth 90 mm




ST 010 205 4980



ST 010 205 4080 mm [inches]



### Flow rate chart




### Certificates

LGA\_18592.

WRAS\_1904065.



ST 010 205 4980



## Spare parts list

em Number	Name	Quantity used	Delivery time
14 10 053 90	seal	1	2
24 04 135 90	nipple	1	2
14 10 008 90	seal	2	2
11 68 004 00-00	spout	1	10
23 01 029 02-00	aerator	1	10
)	14 10 053 90 24 04 135 90 14 10 008 90 11 68 004 00-00	14 10 053 90 seal 24 04 135 90 nipple 14 10 008 90 seal 11 68 004 00-00 spout	14 10 053 90     seal     1       24 04 135 90     nipple     1       14 10 008 90     seal     2       11 68 004 00-00     spout     1