

WATER SHEET Cascade spout for wall-mounted installation - Dark Chrome

SERIES-VARIOUS














13 415 979



- CASCADE, flow rate max. 7 gpm (at 3 bar)
- Function from: gpm

Technical data:

- Cover plate 9-1/2" x 2-3/8"
- 5-7/8" Projection
- 1/2" connection
- Plug-in connection mounting

	Dark Chrome	13 415 979-19
	Chrome	13 415 979-00
	Brushed Platinum	13 415 979-06
	Platinum	13 415 979-08
	Light gold	13 415 979-26
	Brushed Light Gold	13 415 979-27
	Brushed Durabronze (23kt Gold)	13 415 979-28
	Matte Black	13 415 979-33
	Brushed Dark Brass	13 415 979-39
	Brushed Bronze	13 415 979-42
	Brushed Champagne (22kt Gold)	13 415 979-46
	Champagne (22kt Gold)	13 415 979-47
	Brushed Chrome	13 415 979-93
	Brushed Dark Platinum	13 415 979-99

Required article


Rough-in adapter -

35 080 970-90
0010




13 415 979


mm [inches]

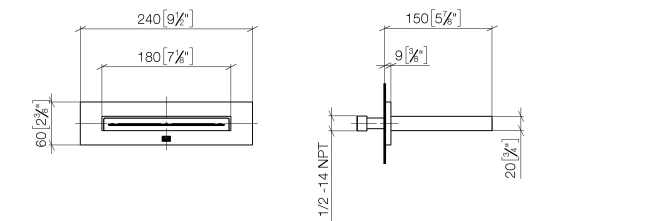

Flow rate chart

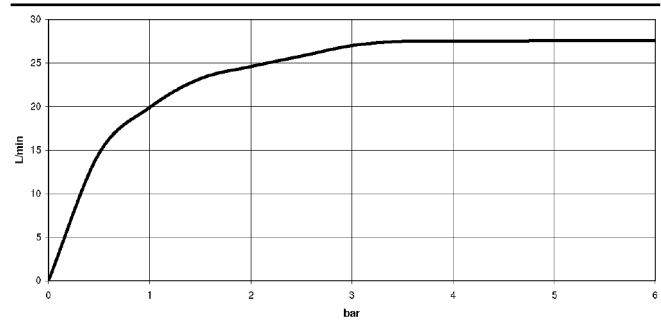

Trajectory length diagram

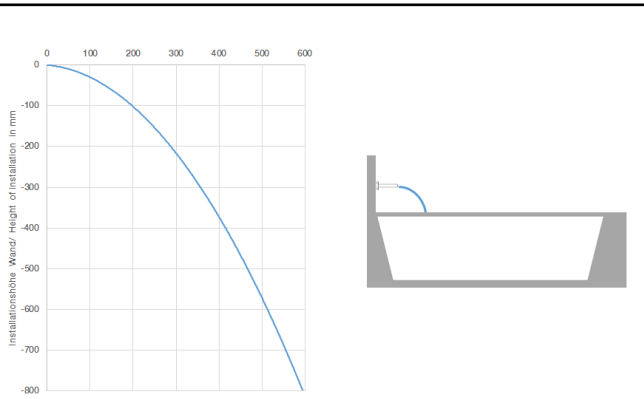

Codes & Standards

ASME A112.18.1	cUPC	Scottish Water Byelaws	UK Water Supply Regulations
----------------	------	------------------------	-----------------------------



WATER SHEET Cascade spout for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 415 979

Certificates and sustainability

WRAS_2306

IAPMO_4976

13 415 979

