

WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS



13 425 979



- Pearlstream
- Flow rate max. 2.5 gpm (at 3 bar)
- Function from: gpm

Technical data:

- Plate 9-1/2" x 2-3/8"
- 7/8" Projection
- Connection 1/2", can be cut to length
- Plug-in connection mounting

	Dark Chrome	13 425 979-19
	Chrome	13 425 979-00
	Brushed Platinum	13 425 979-06
	Platinum	13 425 979-08
	Light gold	13 425 979-26
	Brushed Light Gold	13 425 979-27
	Brushed Durabronze (23kt Gold)	13 425 979-28
	Matte Black	13 425 979-33
	Brushed Dark Brass	13 425 979-39
	Brushed Bronze	13 425 979-42
	Brushed Champagne (22kt Gold)	13 425 979-46
	Champagne (22kt Gold)	13 425 979-47
	Brushed Chrome	13 425 979-93
	Brushed Dark Platinum	13 425 979-99

Required article

Rough-in adapter -


35 080 970-90
0010



WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 425 979
mm [inches]

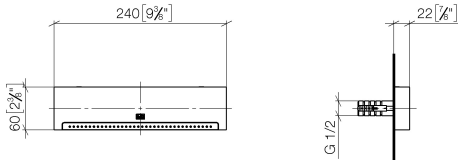

Flow rate chart



Trajectory length diagram



Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with PEARLSTREAM for wall-mounted
installation - Dark Chrome

SERIES-VARIOUS

13 425 979
Certificates and sustainability

LGA_19 IAPMO_4976

WATER FALL Cascade spout with PEARLSTREAM for wall-mounted installation - Dark Chrome

SERIES-VARIOUS

13 425 979

