

IMO Lavatory spout, wall-mounted without drain - Brushed Chrome



IMO

13 800 671

Product version from 4/1/2024




- 6-3/4" Projection
 - Rigid spout
 - Rectangular aerated stream
 - 1-5/8" hole diameter
 - Flange 3-1/8" x 2-3/8"
 - 1/2" connection
 - Water flow rate limited to max. 1.2 gpm
 - lead-free
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- For Touchfree control please order eSet Touchfree with temperature adjustment**
- For Touchfree control please order eSet Touchfree with temperature adjustment

| | | |
|---|----------------|--------------------|
|  | Brushed Chrome | 13 800 671-93 0010 |
|  | Chrome | 13 800 671-00 0010 |

Required article

| | | |
|---|--------------------|--------------------|
|  | Rough-in adapter - | 35 080 970-90 0010 |
|---|--------------------|--------------------|

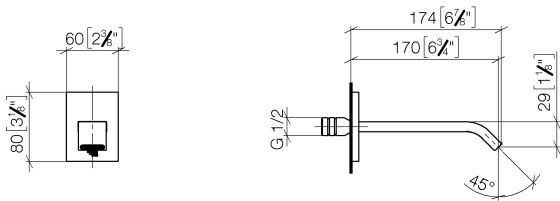


Codes & Standards

| | | | |
|----------------|------------|---|--------|
| ASME A112.18.1 | cUPC | EPA WaterSense | NSF372 |
| NSF61 | WaterSense |  | |

Certificates and sustainability

| | | | |
|------------|--------------|------------|--------------|
| IAPMO_8834 | IAPMO_N-4976 | IAPMO_6397 | IAPMO_4976 (|
|------------|--------------|------------|--------------|

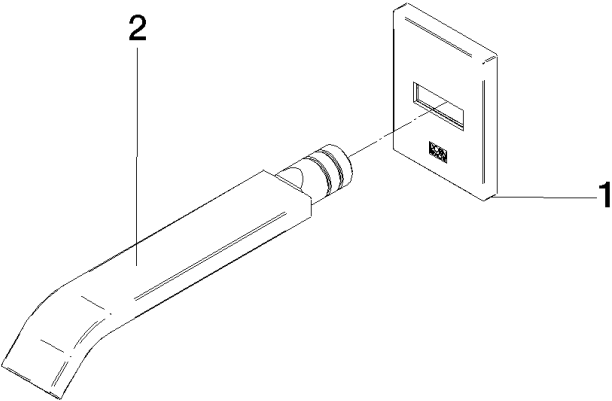

Spare parts list

| Number | Item Number | Designation | Number of units | Lead time |
|--------|--------------------|-------------|-----------------|-----------|
| 2 | 90 28 22 413 00-93 | spout | 1.00 | 20 |
| 1 | 90 27 67 023 00-93 | rosette | 1.00 | 20 |