



TARA ULTRA HOT & COLD WATER DISPENSER - Champagne (22kt Gold)

TARA ULTRA

17 861 875 Product version from 5/28/2022



- 5-3/4" Projection
- Rigid, thermally insulated spout
- Laminar stream
- Total height 11-3/8"
- 7-1/8" height to aerator/spout outlet
- 1-3/8" hole diameter
- Provides filtered, hot water, 199°F max. temperature
- Provides filtered, cold water (not chilled)
- Water flow rate limited to max. 0.5 gpm
- control unit for wall assembly (5-3/8" x 6-1/4" x 2-3/8")
- electronic valve
- plug-in power supply, 100-230 V, 50-60 Hz, 18 W, incl. country-specific adaptor set
- lead-free
- One lever for hot and cold water
- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Compatible with Insinkerator® hot water tank HWT300-F3000S. Tank and filter not supplied from Dornbracht. More information on tank and filter at www.insinkerator.com.

The installation must be above a kitchen sink.












We recommend replacing the filter cartridge every six months. Please see the installation manual for more information.


Specification and technical data sheets can be found on www.dornbracht.com/professional

(ADA)


NOTE: Not compatible with Reverse Osmosis

Not compatible with reverse osmosis filtration

| | | |
|---|-------------------------------|---------------|
|  | Champagne (22kt Gold) | 17 861 875-47 |
|  | Chrome | 17 861 875-00 |
|  | Brushed Platinum | 17 861 875-06 |
|  | Platinum | 17 861 875-08 |
|  | Durabrand (23kt Gold) | 17 861 875-09 |
|  | Dark Chrome | 17 861 875-19 |
|  | Brushed Durabrand (23kt Gold) | 17 861 875-28 |
|  | Matte Black | 17 861 875-33 |
|  | Brushed Champagne (22kt Gold) | 17 861 875-46 |
|  | Brushed Chrome | 17 861 875-93 |
|  | Brushed Dark Platinum | 17 861 875-99 |



Technical drawing of the M34x1 1/2" (M34x1.5") bolt. The drawing shows a side view and a cross-section. The side view indicates a total length of 288 mm [11 1/8"], a head diameter of 60 mm [2 3/8"], and a head height of 89 mm [3 5/8"]. The cross-section shows a thread diameter of 35 mm [1 3/8"] and a thread pitch of 1.5 mm [1/16"].

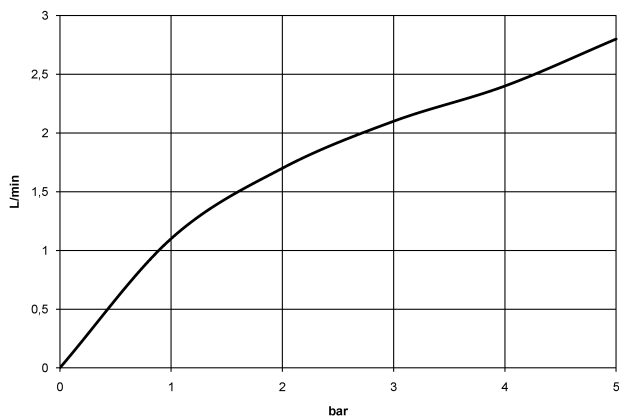

| | | | |
|--------------------------|----------------|------------------------------------|------|
| ADA | ASME A112.18.1 | California Energy Commission (CEC) | cUPC |
| Executive Order no. 1007 | NSF372 | NSF61 | |



TARA ULTRA HOT & COLD WATER DISPENSER - Champagne (22kt Gold)

TARA ULTRA

17 861 875 Product version from 5/28/2022

Certificates and sustainability

IAPMO_N-4

GDV_0400

IAPMO_6

IAPMO_4976 (

17 861 875 Product version from 5/28/2022

Parts for other
finishes can be found
here: [Chrome](#)

