

TARA Tub mixer for wall-mounted installation with hand shower set - Dark Chrome

TARA

25 133 882



- Spout: Round aerated stream
- Water flow rate limited to max. 5.8 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- 9-1/2" Projection
- Tub / shower diverter
- Flanges Ø 2-1/2"
- Wall bracket with flange Ø 2"
- 1/2" connection
- Center to center 5-7/8" ± 5/8"
- Metal shower hose 49-1/4" with anti-twist device (ADA)

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90) Internal backflow preventer.

Combination with risers possible on request (special production).

(ADA)

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.

Combination with risers possible on request (special production).

	Dark Chrome	25 133 882-19
	Chrome	25 133 882-00
	Brushed Platinum	25 133 882-06
	Platinum	25 133 882-08
	Brushed Durabronze (23kt Gold)	25 133 882-28
	Matte Black	25 133 882-33
	Brushed Champagne (22kt Gold)	25 133 882-46
	Champagne (22kt Gold)	25 133 882-47
	Brushed Chrome	25 133 882-93
	Brushed Dark Platinum	25 133 882-99

Required article



Rough-in adapter -


- Please order 2 adapters

35 080 970-90
0010

TARA Tub mixer for wall-mounted installation with hand shower set - Dark Chrome

TARA

25 133 882
mm [inches]

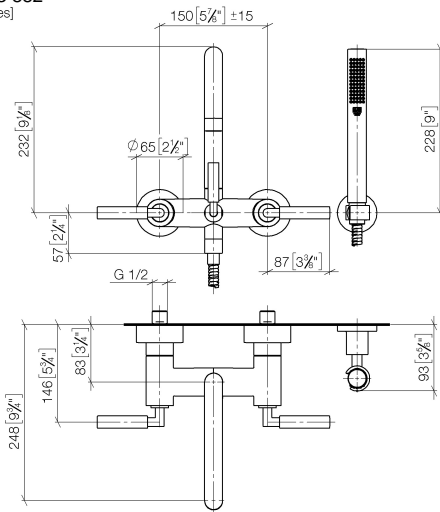

Flow rate chart



Codes & Standards

ADA

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



TARA Tub mixer for wall-mounted installation with hand shower set - Dark
Chrome

TARA

25 133 882

Certificates and sustainability

WRAS_2210

LGA_18

TARA Tub mixer for wall-mounted installation with hand shower set - Dark Chrome

TARA

25 133 882

